

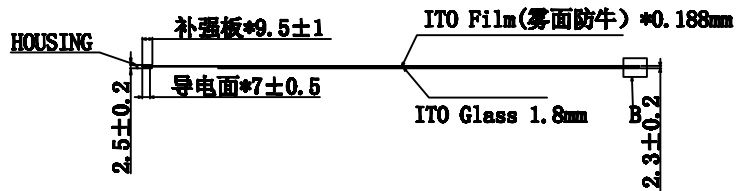


| CONNECTOR PINOUT | |
|------------------|-------------|
| PIN NO. | DESIGNATION |
| 1 | UR |
| 2 | UL |
| 3 | SG |
| 4 | LL |
| 5 | LR |



Instruction:

1. Type: Film to Glass
2. Operating Voltage: 3~7V
3. Response Time: ≤10ms
4. Storage Temperature: -20°C~+50°C
5. Operation Temperature/Humidity: -10°C~+50°C/20%~95%
6. Hitting Life: >10,000,000 Times. 250gf Force
7. Writing Life: >1,000,000 Times. 250gf Force
8. Connect Material: PFC

9. Film Thickness: 0.188mm
10. Glass Thickness: 1.8mm
11. Light Transmission: ≥78%
12. Force: 100g or less
13. Linearity: ≤2.5%
14. Insulation: ≥20MΩ
15. Surface Hardness: ≥3H (pencil)
16. 未标注公差为±0.3

MAXEN ELECTRONICS LIMITED

| | | | |
|-----------|----------------|-----------|------|
| MODEL NO. | HCT-104Q506-R3 | UNIT: | MM |
| DRAWN: | | TOLRANCE: | ±0.3 |
| DATE: | 18-4-12 | SCALE: | 1:1 |
| VERSION: | 1.0 | REV: | |