



| Rev | Nature of Modification | DATE |
|-----|------------------------|-----------|
| 01 | 原始版本 | 2021-3-10 |


Front View

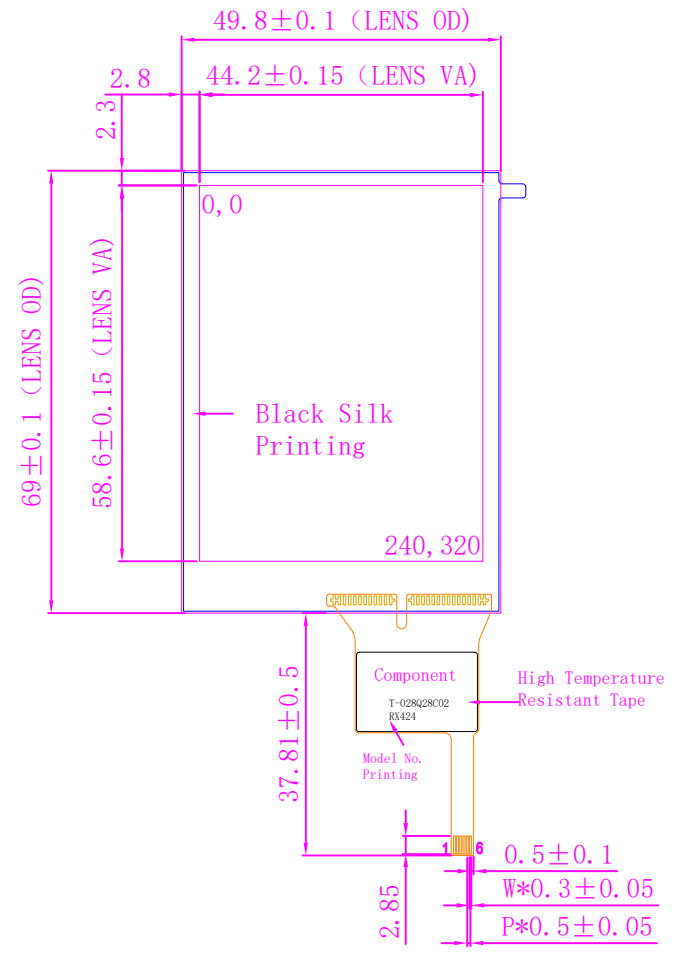

Side View

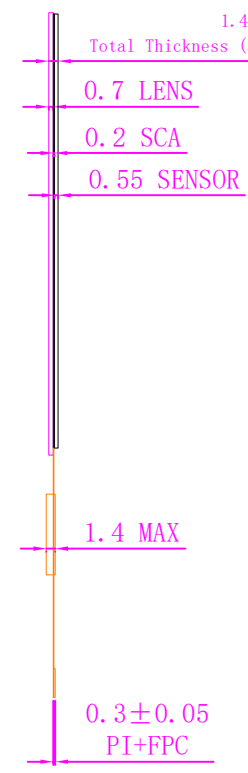

Back View

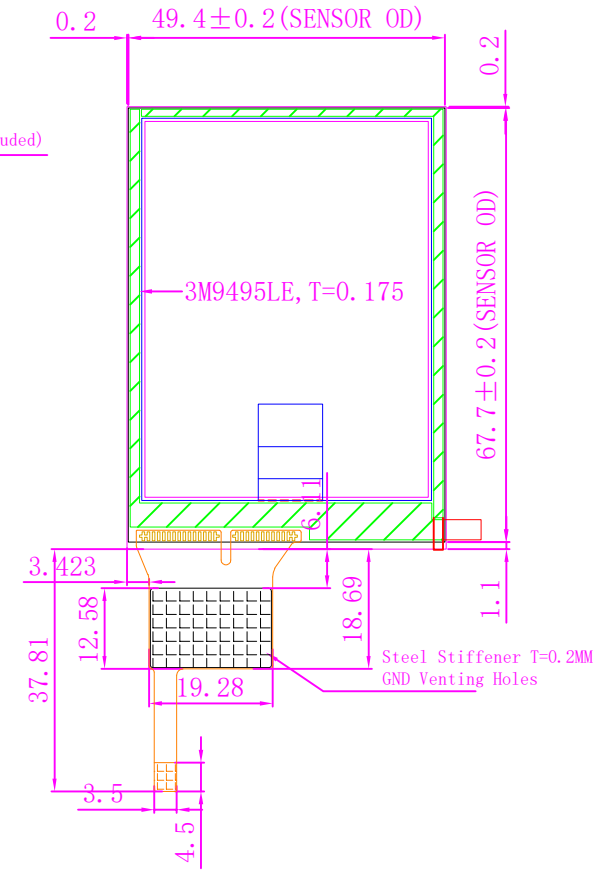

- Technical Parameters:**
- Glass Lens + ITO Glass + Adhesive + FPC
 - IC:GT911
 - Operating Voltage: 2.8V~3.3V
 - Transparency: ≥85%
 - Surface Hardness: ≥6H
 - Operating Environment: -20°C~+60°C, ≤90%RH
 - Storage Environment: -30°C~+70°C, ≤90%RH
 - Unmarked Tolerance: ±0.2mm
 - RoSH Compliant

实物
I2C: 2.8

| PIN | Logic |
|-----|-------|
| 1 | GND |
| 2 | VCC |
| 3 | RST |
| 4 | INT |
| 5 | SDA |
| 6 | SCL |

| | |
|------------------------------|-------------|
| SCALE: 1 : 1 NOT TO SCALE | |
| PAGE: 1 OF 1 | |
| GENERAL TOL. 0.50mm | UNITS MM |
| APPROVALS | DATE |
| APP: | |
| CHK: YANHAI | 2021-3-10 |
| DWN: LY | 2021-3-10 |

| | | | |
|----------------|-------------------|--|----------------|
| MODEL NUMBER : | HCT-GG028RX4A-1.0 | | CUSTOMER NO. : |
| | | | DATE: |