




8 7 6 5 4 3 2 1

Rev	Nature of Modification	DATE
1.0	初版	2019/12/27
2.0	更改FPC外形	2020/2/21

### FRONT VIEW

### SIDE VIEW

### BACK VIEW

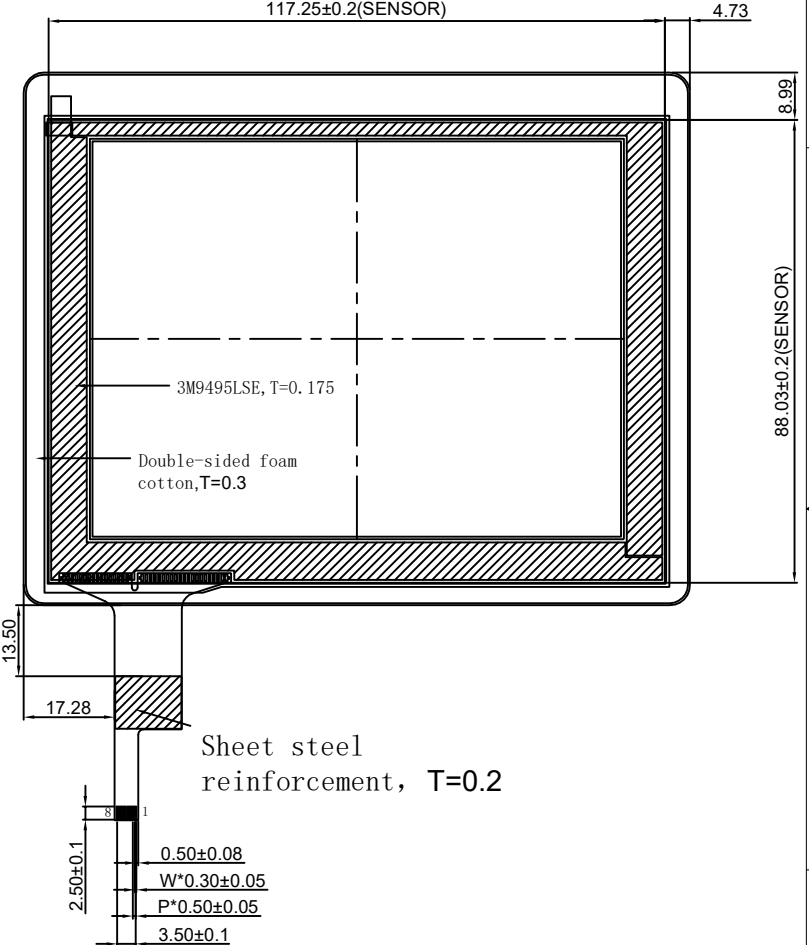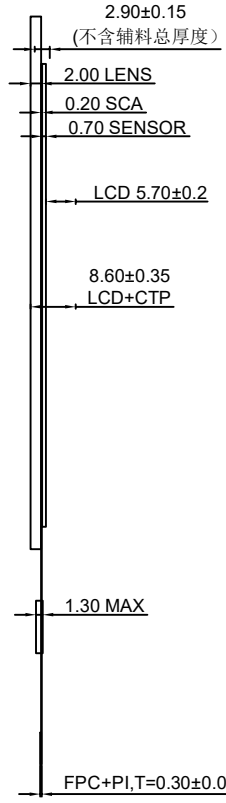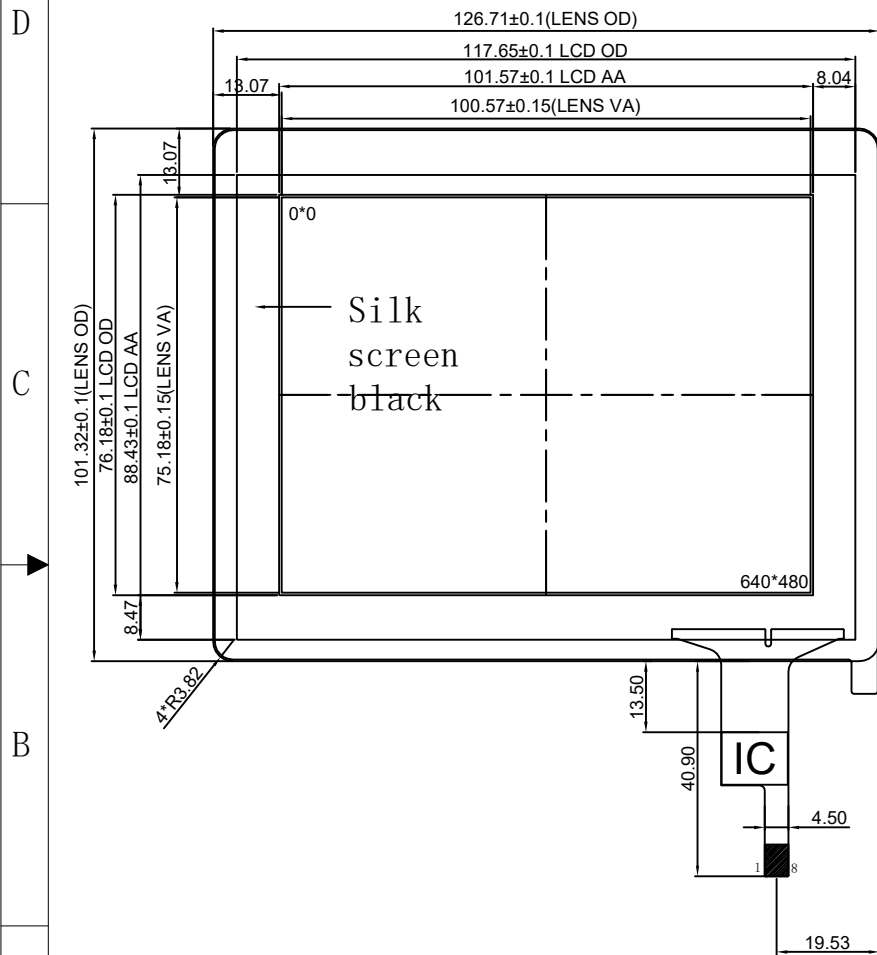

**Parameters**

1. Structure G+G
2. Working voltage 2.8-3.3 V I2C:2.8V~3.3V
3. IC:GT911
4. Transparency rate ≥85%
5. Surface hardness H
6. Working temp -20°~+70°≤90%RH
7. Storage temp -30°~+80°≤90%RH
8. Unmarked tolerance ±0.2mm

1	GND
2	SCL
3	SDA
4	INT
5	RESET
6	NC
7	VDD
8	NC

SCALE: 1 : 1 NOT TO SCALE	
PAGE: 1 OF 1	
GENERAL TOL. 0.50mm	UNITS MM
APPROVALS	DATE
APP:	
CHK: YANHAI	2020-2-21
DWN: LY	2020-2-21

**MAXEN ELECTRONICS LIMITED**

MODEL NUMBER : HCT-GG050326RX-2.0

CUSTOMER NO.:

DATE:

0 7 6 5 4 3 2 1