



Rev.	Revision Record		DATE
AO	Initial Issue	Y	2021-03-19


Front view

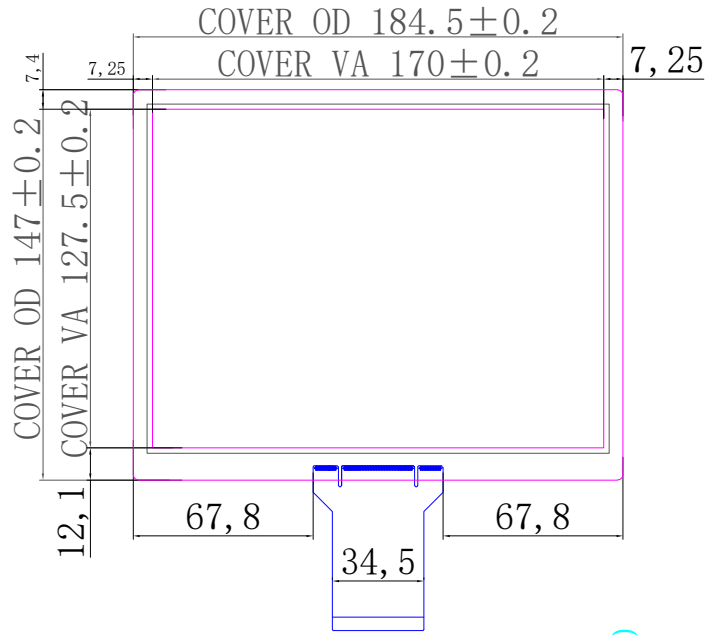

Side view




Dorsal view

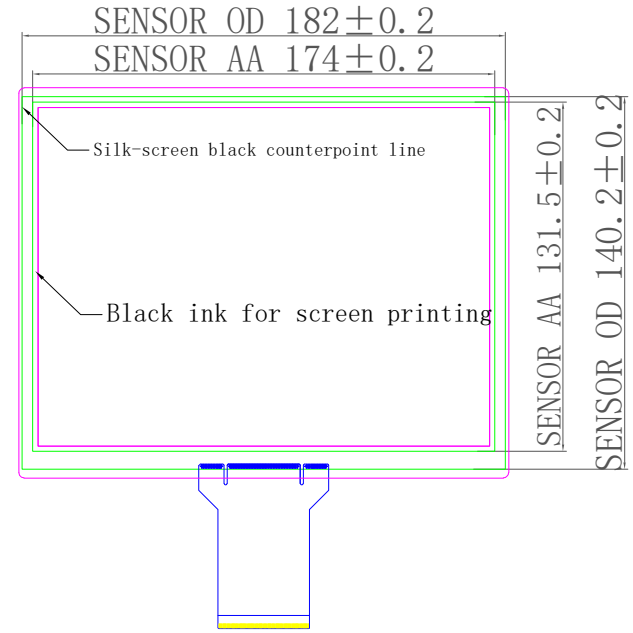

Technical parameters :

- Cover Glass+Loca+ITO Glass+FPC
- ITO Glass:T=0.7±0.05mm
- Cover Glass:T=0.7±0.05mm Surface AR treatment
- Interface:USB+IIC
- Surface hardness:≥6H
- Transmittance:≥85%
- Operation voltage:3.3V
- Operation temperature:-20℃~+70℃, ≤85%RH
- Storage temperature:-30℃~+80℃, ≤85%RH
- ROHS must be complied
- Unspecification tolerance are ±0.2mm

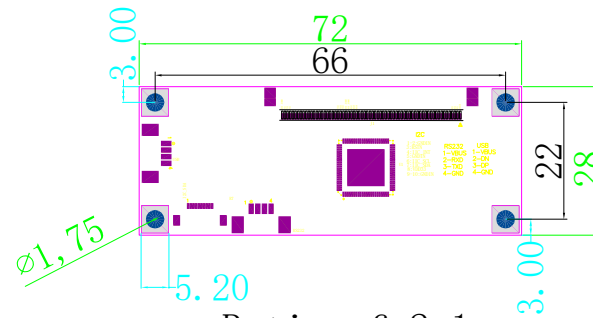

Ratio of 2:1

J1 (USB)	
PIN	Definition
1	VDD/5V
2	D-
3	D+
4	GND

J2 (I2C通讯)	
PIN	定义
1	GND
2	GND
3	VDD
4	SDA
5	SCL
6	GND
7	INT
8	RST
9	GND
10	GND

MAXEN ELECTRONICS LIMITED

TITLE:	HCT084LLYH-3A			
Designed By:	Y	Customerid:		View:
Checked By:		Unit:	mm	
Approved By:		Date:	2022.07.21	Scale: 1:1