



Front View

Side View

Back View

客户签名:

日期:

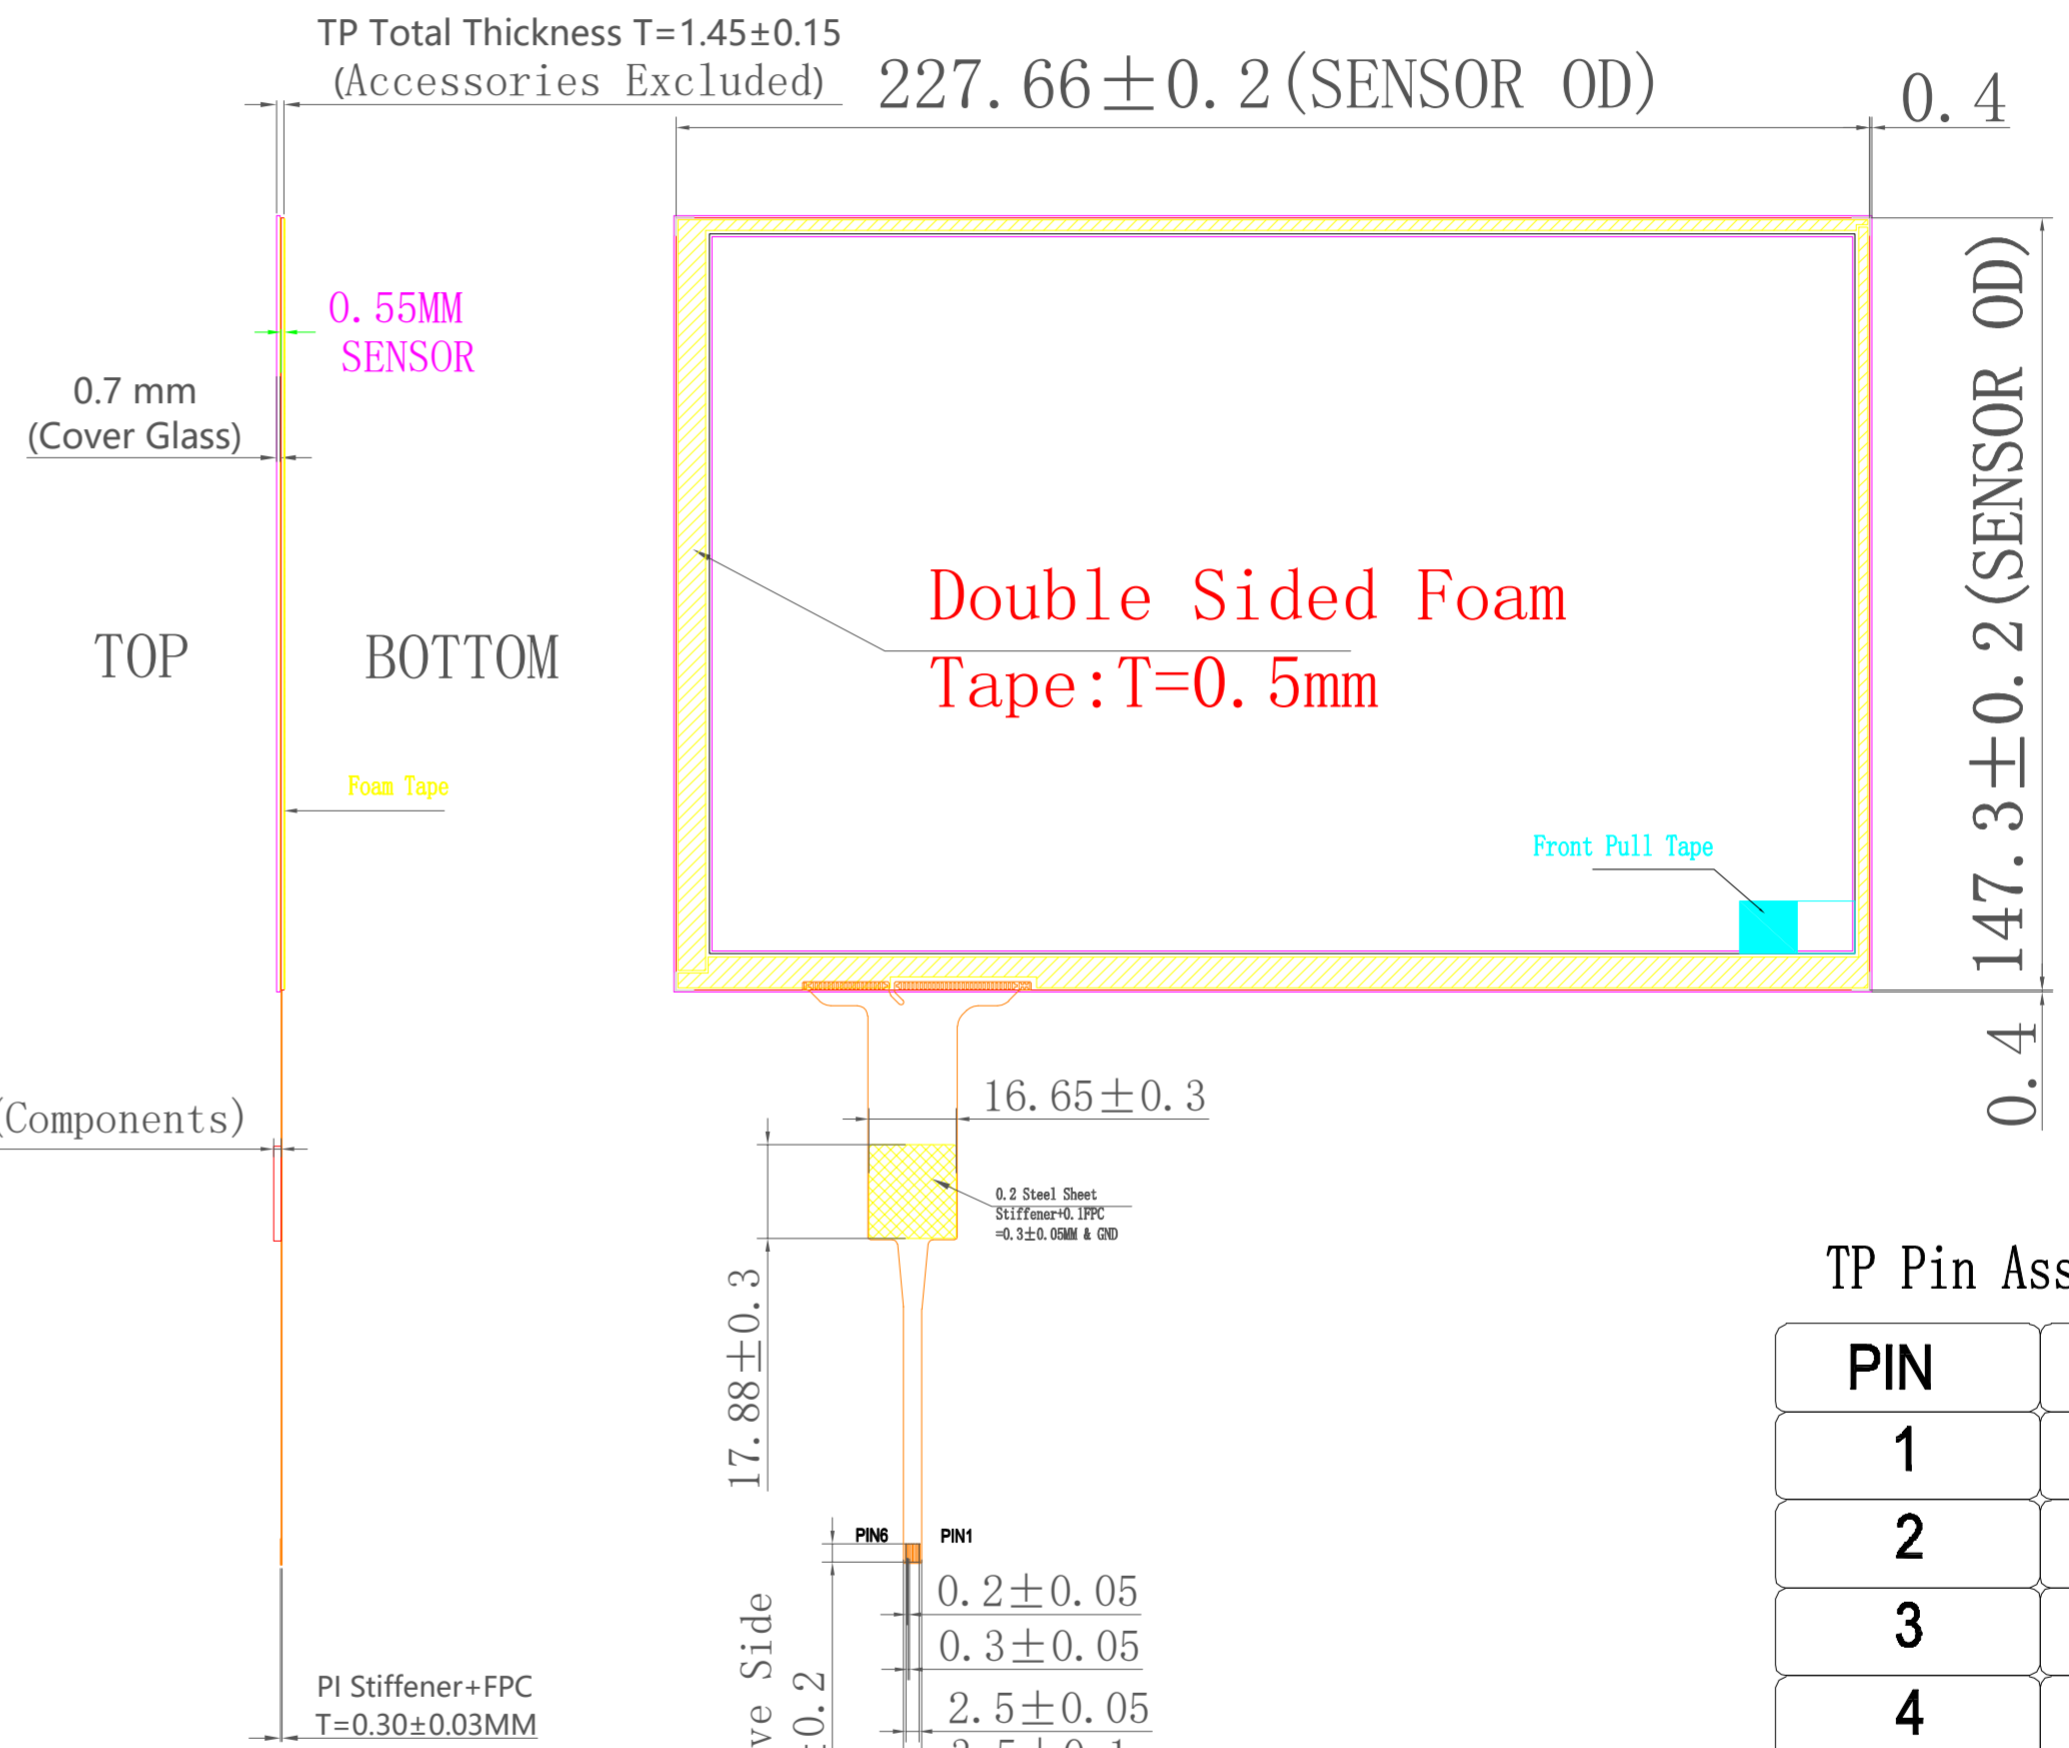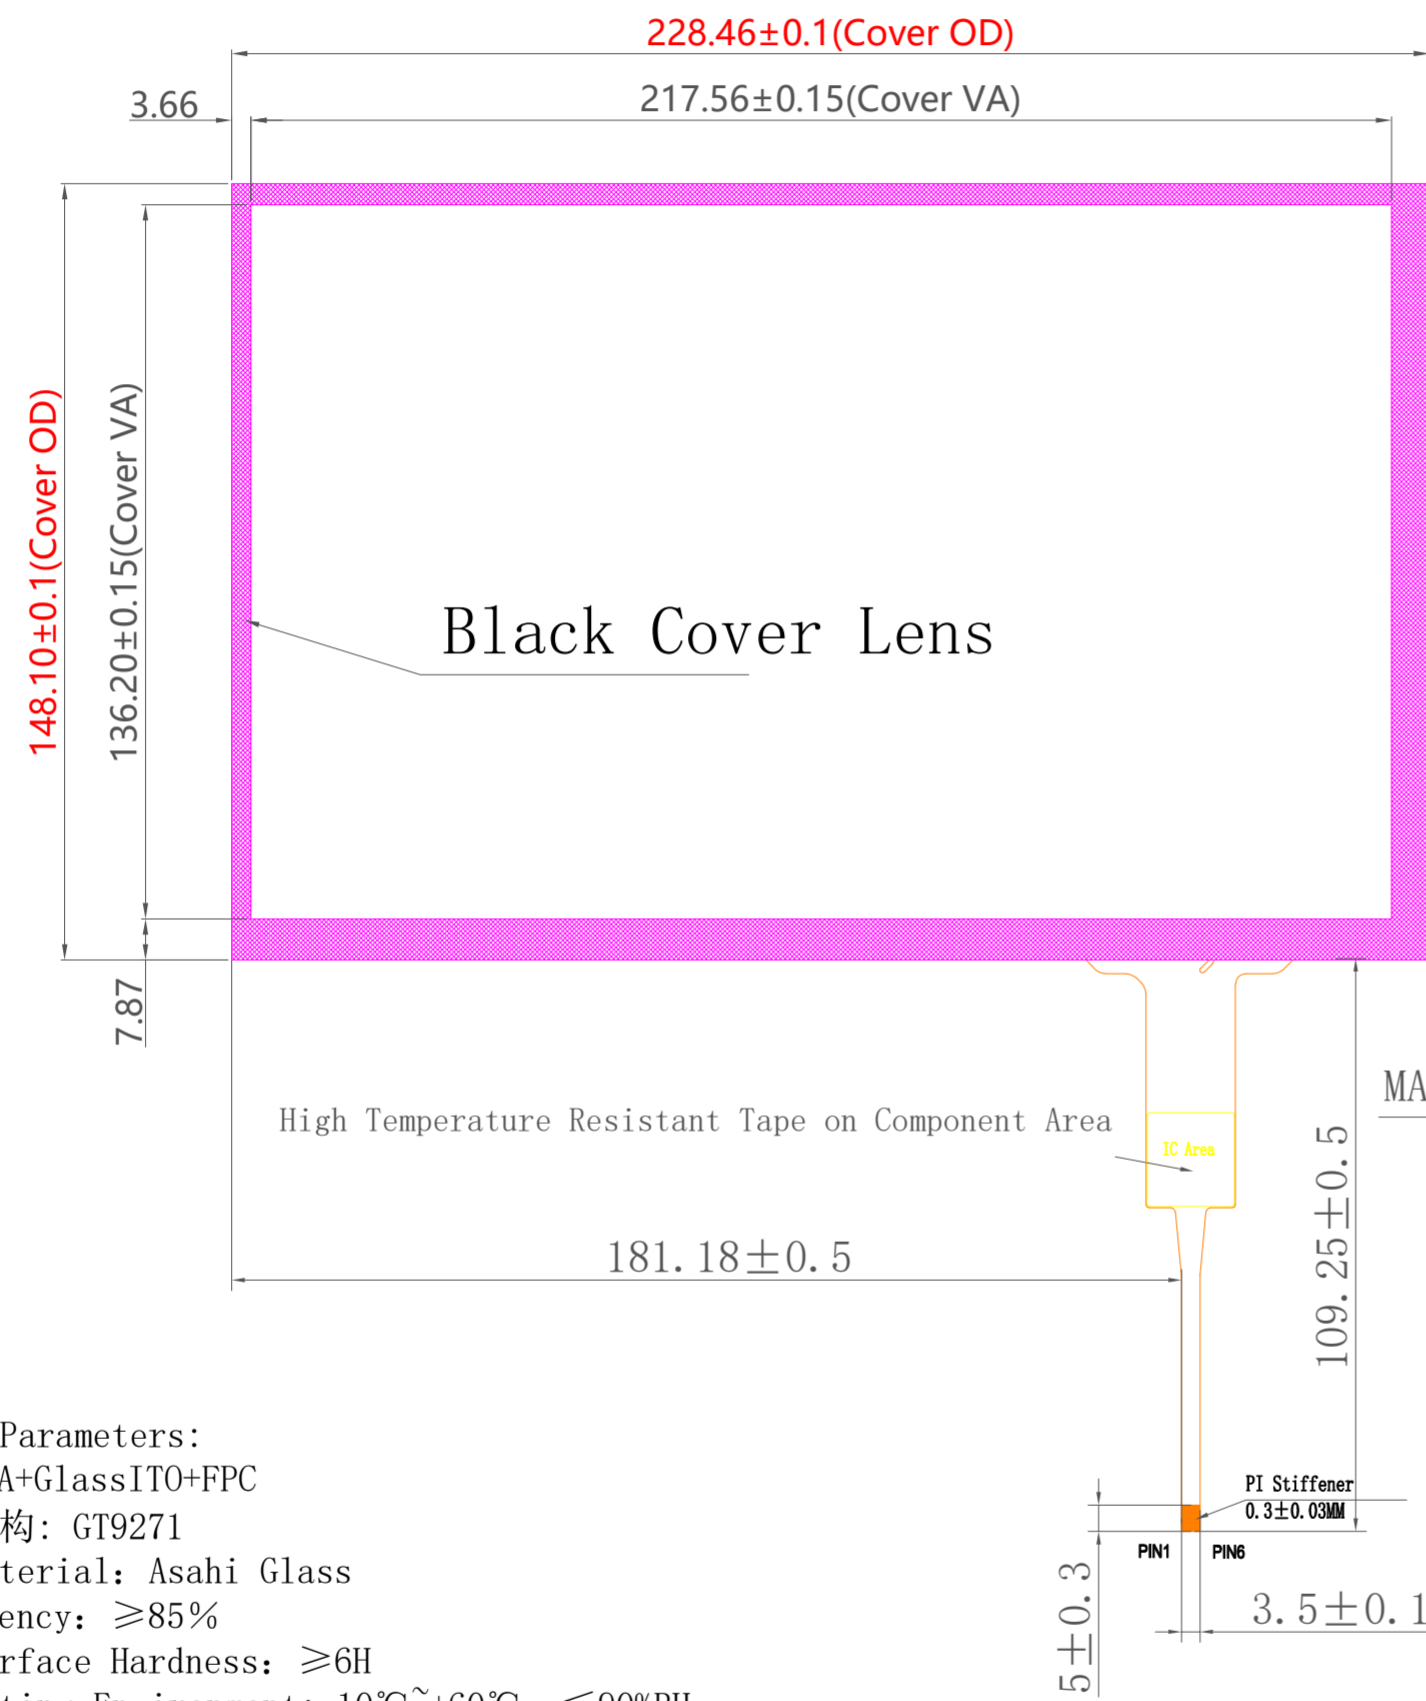

- Technical Parameters:
1. GLASS+SCA+GlassITO+FPC
 2. GG/COF结构: GT9271
 3. Glass Material: Asahi Glass
 4. Transparency: $\geq 85\%$
 5. Glass Surface Hardness: $\geq 6H$
 6. TP Operating Environment: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$, $\leq 90\%RH$
 7. TP Storage Environment: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\%RH$
 8. ROHS Compliant
 9. Unmarked Tolerance $\pm 0.2\text{mm}$

TP Pin Assignment

PIN	定义
1	RST
2	VDD
3	GND
4	INT
5	SDA
6	SC1

物料	NO.	更改内容	日期
	①		
	②		
	③		
	④		
	⑤		
	⑥		
	⑦		

工程确认图			MAXEN ELECTRONICS LIMITED			
方向			公司编号	HCT1119GG101A1-V0	未注公差	± 0.20
绘图	审核	日期	客户编号		单位	mm
		20210105	版本号		比例	1 : 1