



Rev.	Revision Record	制作	日期
A0	First Release	Y	2019-11-04


Front View

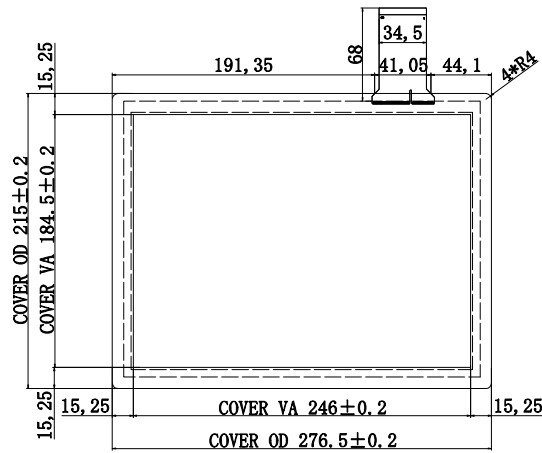

Side View

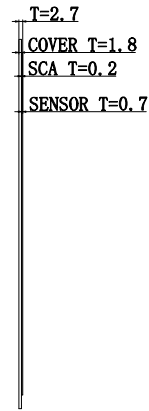

Back View

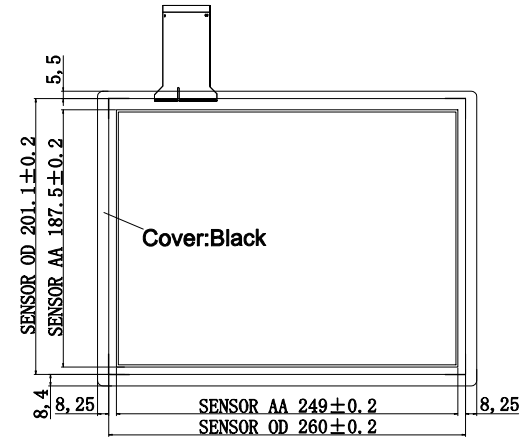

Parameters:

1. TP Structure:G+G;
2. TP type: COB;IC: ILI2511, 68P
HA2511P.P1.C3 Working Volt. :5V
3. Transparency rate $\geq 85\%$
4. Surface Hardness > 6H
5. Working temp. : $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 85\% \text{RH}$
6. Storage temp. : $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 85\% \text{RH}$
7. Unmarked tolerance $\pm 0.5 \text{mm}$
8. ROHS compliance



J1 (USB)	
PIN	Assignment
1	VDD/5V
2	D-
3	D+
4	GND

J2 (I2C)	
PIN	Assignment
1	VDD3.3
2	SDA
3	SCL
4	INT
5	RST
6	GND

MAXEN ELECTRONICS LIMITED

TITLE: 产品编号	HCT121005H-AAA		
Designed By: 设计	Y	Customerid: 客户编号	
Checked By: 审核		Unit: 单位	mm
Approved By:		Date: 日期	2017.11.04
		View: 投影方式	
		Scale: 比例	1:1