



Rev.	Revision Record	制作	日期
A0	First Release	Y	2019-08-15
A0	FOG modification	Y	2019-08-20


### Front View

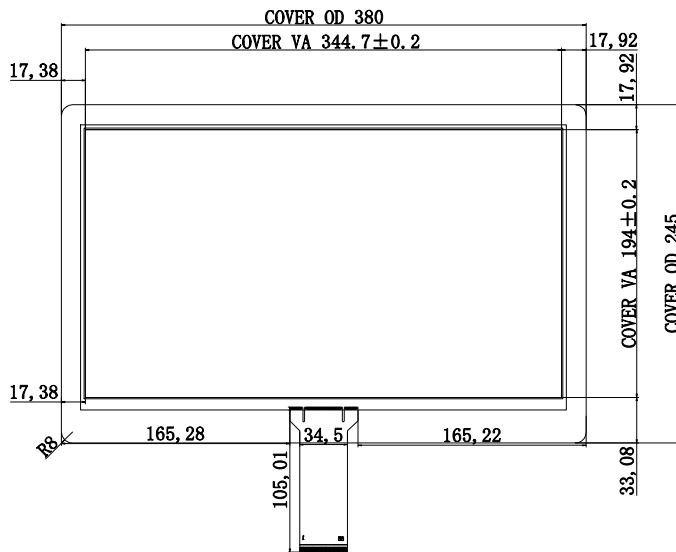

### Side View

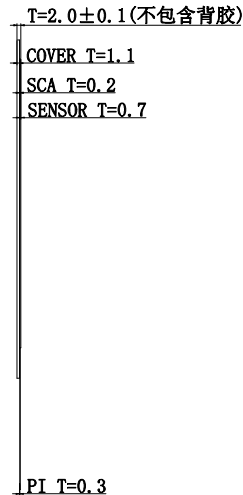

### Back View

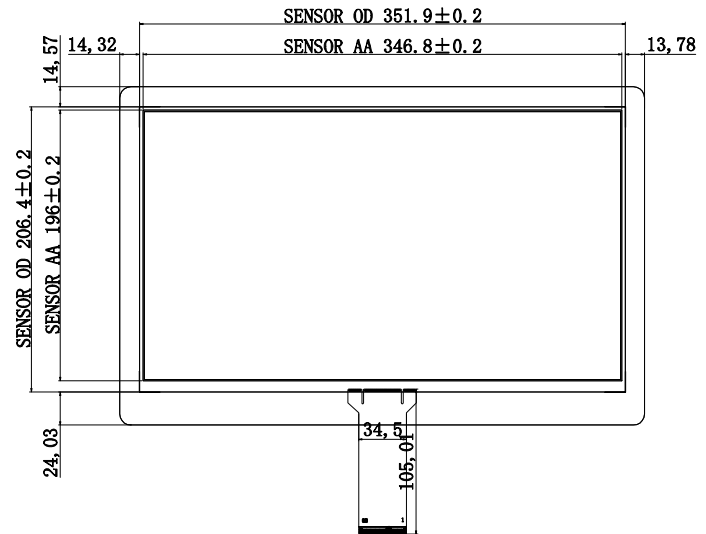

- Parameters:
- 1.TP structure: Glass+Glass
  - 2.TP type: COB, controller: ILI2511
  - 3.Working Volt.:5V
  - 4.Transparency Rate > 85%
  - 5.Surface Hardness >6H
  - 6.Working temp.: -20 to 70 degree, < 85%RH
  - 7.Storage temp.: -30 to 80 degree, < 85%RH
  - 8.Unmarked tolerance +/- 0.5mm
  9. ROHS compliance



J1 (USB通讯)	
PIN	定义
1	VDD/5V
2	D-
3	D+
4	GND

J2 (I2C通讯)	
PIN	定义
1	RST
2	VDD
3	GND
4	INT
5	SDA 3.3V
6	SCL 3.3V

### MAXEN ELECTRONICS LIMITED

TITLE: 产品编号	HCT156001H-BBB				
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式	
Checked By: 审核		Unit: 单位	mm	Scale: 比例	1:1
Approved By:		Date: 日期	2019.08.15		