


客户签名:
日期:

Front View Side View Back View

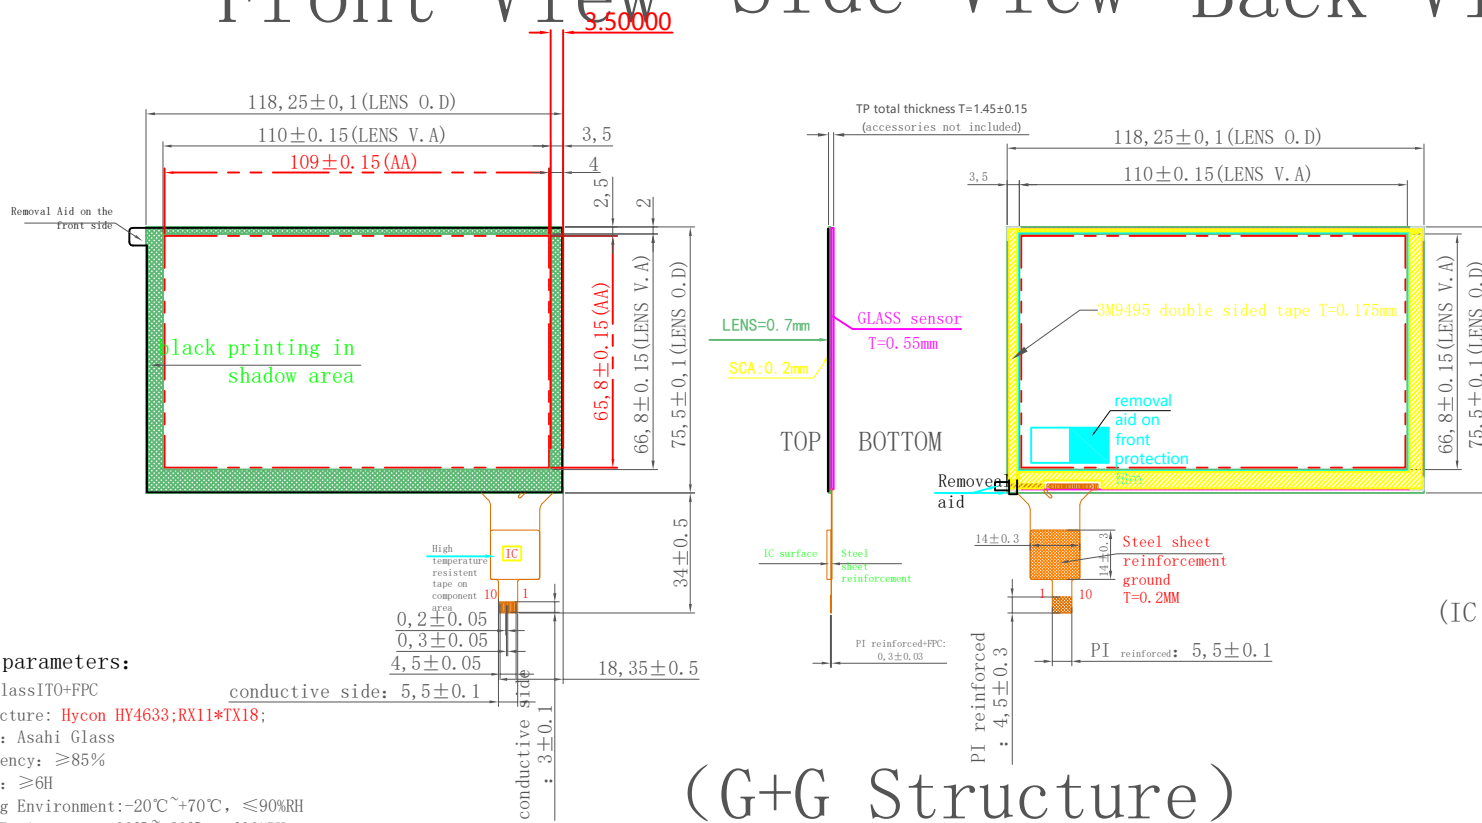

Technical parameters:

1. GLASS+SCA+GlassITO+FPC
2. GG/COF Structure: Hycon HY4633;RX11*TX18;
3. CG Material: Asahi Glass
4. CG Transparency: ≥85%
5. CG Hardness: ≥6H
6. TP Operating Environment: -20°C~+70°C, ≤90%RH
7. TP Storage Environment: -30°C~+80°C, ≤90%RH
8. ROHS compliant
9. Unspecified Tolerance: ±0.2mm

产品逻辑图
(IC Communication)

PIN#	ASSIGNMENT
1	GND
2	VDD
3	SCL
4	NC
5	SDA
6	NC
7	RST
8	NC
9	INT
10	GND

(G+G Structure)

物料	NO.	更改内容	日期	工程确认图		MAXEN ELECTRONICS LIMITED			
	①			方向		公司编号	HCT1565GG050A1-V0	未注公差	±0.20
	②					客户编号		单位	mm
	③			绘图	审核	日期	20210830	版本号	
	④							比例	1 : 1
	⑤								
	⑥								
	⑦								

1

2

3

4

5

6