
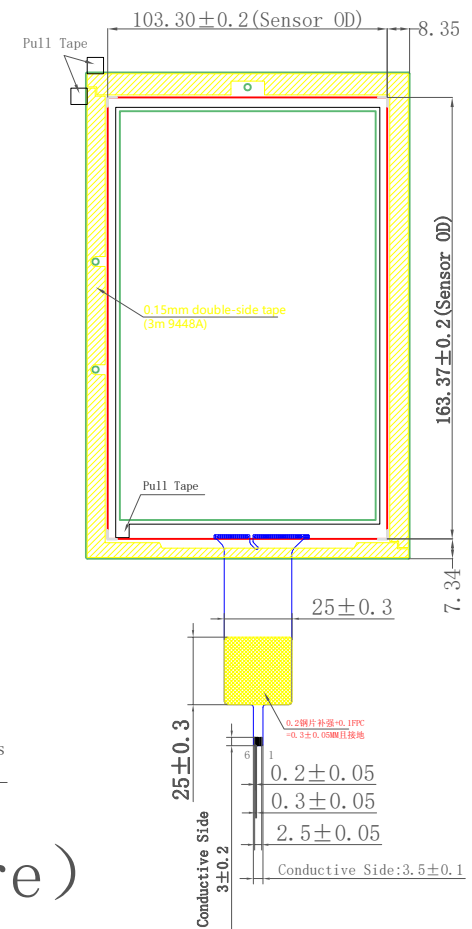
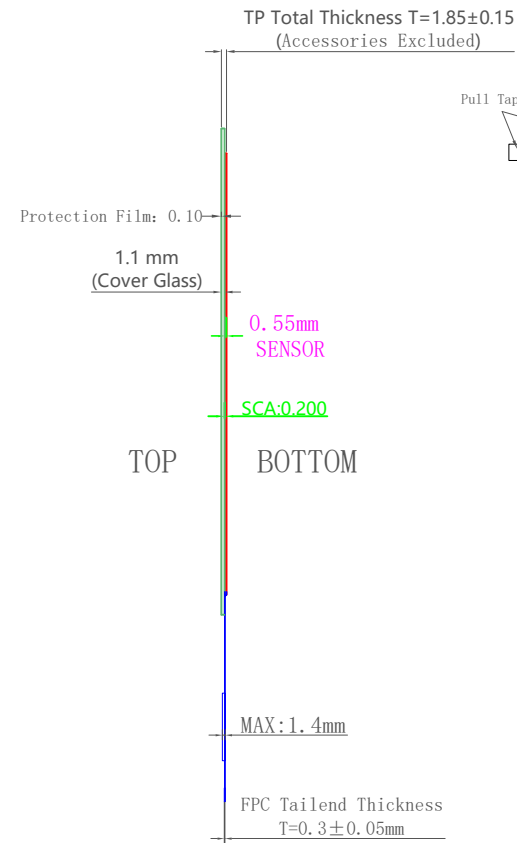


客户签名:
日期:

Front View

Side View

Back View

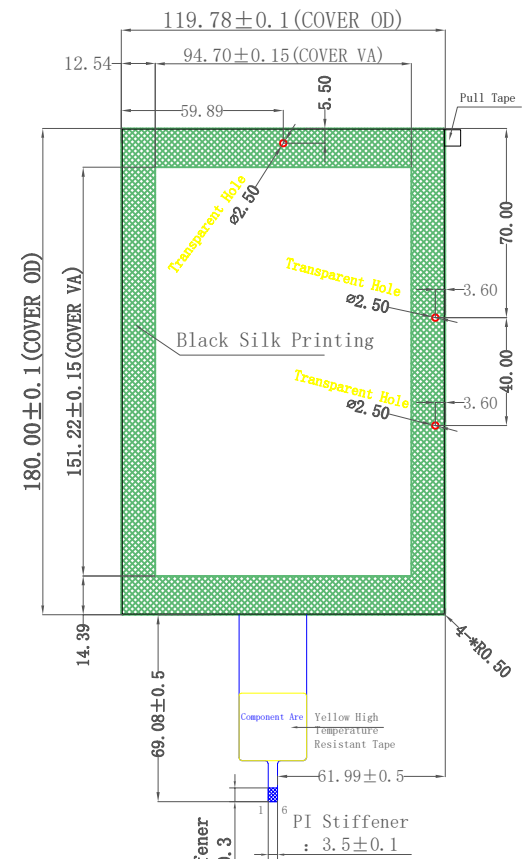

Technical Parameters:
 1. GLASS+SCA+GlassITO+FPC
 2. GG/COF Structure: GT911
 3. Glass Material: Asahi Glass
 4. Glass Transparency: ≥85%
 5. Glass Hardness: ≥6H
 6. TP Operating Environment: -20°C~+70°C, ≤90%RH
 7. TP Storage Environment: -30°C~+80°C, ≤90%RH
 8. ROHS compliant
 9. Unmarked Tolerance: ±0.2mm

PI Stiffener
: 5 ± 0.3
 Component Area
Yellow High Temperature Resistant Tape
 PI Stiffener
: 3.5 ± 0.1

(G+G Structure)

IIC Interface

PIN	Definition
1	GND
2	SDA
3	SCL
4	INT
5	RST
6	VDD

物料	NO.	更改内容	日期
	1		
	2		
	3		
	4		
	5		
	6		
	7		

工程确认图			MAXEN ELECTRONICS LIMITED			
方向			公司编号	HCT1685GG070A1-V0	未注公差	±0.20
绘图	审核	日期	客户编号		单位	mm
		20220430	版本号		比例	1 : 1

1

2

3

5

6

由 AUTODESK 学生版生成

由 AUTODESK 学生版生成