


| Rev. | Revision Record | 制作 | 日期         |
|------|-----------------|----|------------|
| A0   | 首次发行            | Y  | 2017-07-09 |
|      |                 |    |            |
|      |                 |    |            |



### Front View

### Side View

### Back View

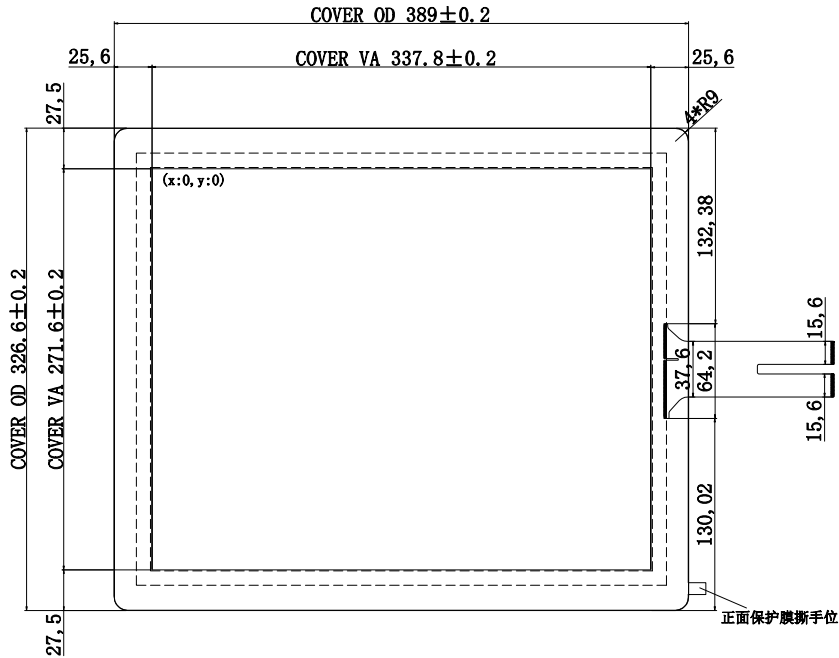

T=2.7 (Exc. tape)  
COVER T=1.8  
SCA T=0.2  
SENSOR T=0.7

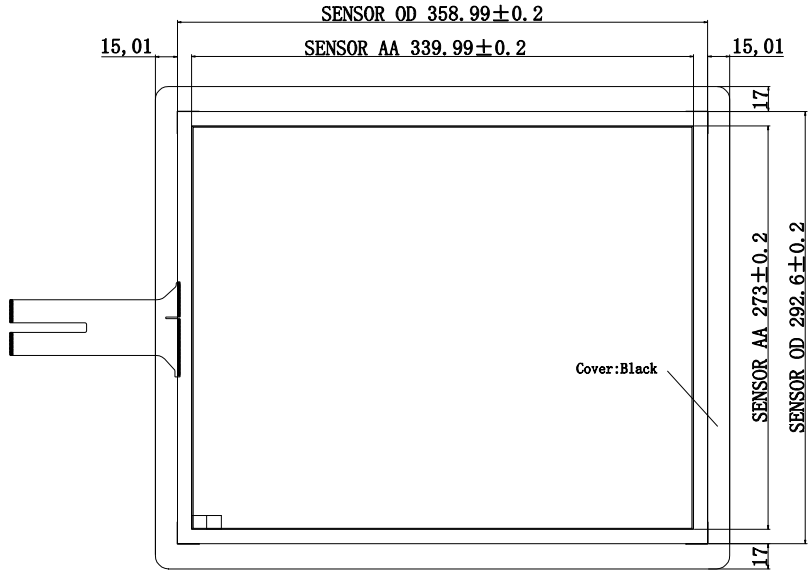

- Parameters:**
- 1.TP Structure:G+G
  - 2.Type:COB,IC:ILI2510,51x51 HA2510P.P1.C3
  - 3.Transparency>85%
  - 4.Surface hardness>6H
  - 5.Working temp.: -20 to 70 degree, <85%RH
  - 6.Storage temp.: -20 to 70 degree, <85%RH
  - 7.Unmarked tolerance+/- 0.5mm
  - 8.ROHS compliance

| J1 (USB) |           |
|----------|-----------|
| PIN      | Interface |
| 1        | VDD/5V    |
| 2        | D-        |
| 3        | D+        |
| 4        | GND       |

| J2 (I2C) |           |
|----------|-----------|
| PIN      | Interface |
| 1        | VDD3.3    |
| 2        | SDA       |
| 3        | SCL       |
| 4        | INT       |
| 5        | RST       |
| 6        | GND       |

| MAXEN ELECTRONICS LIMITED |                |                     |            |               |
|---------------------------|----------------|---------------------|------------|---------------|
| TITLE:<br>产品编号            | HCT170003H-AAA |                     |            |               |
| Designed By:<br>设计        | Y              | Customerid:<br>客户编号 |            | View:<br>投影方式 |
| Checked By:<br>审核         |                | Unit:<br>单位         | mm         |               |
| Approved By:              |                | Date:<br>日期         | 2017.07.09 | Scale:<br>比例  |
|                           |                |                     |            | 1:1           |