




# Front View

# Side View

# Back View

客户签名:

日期:

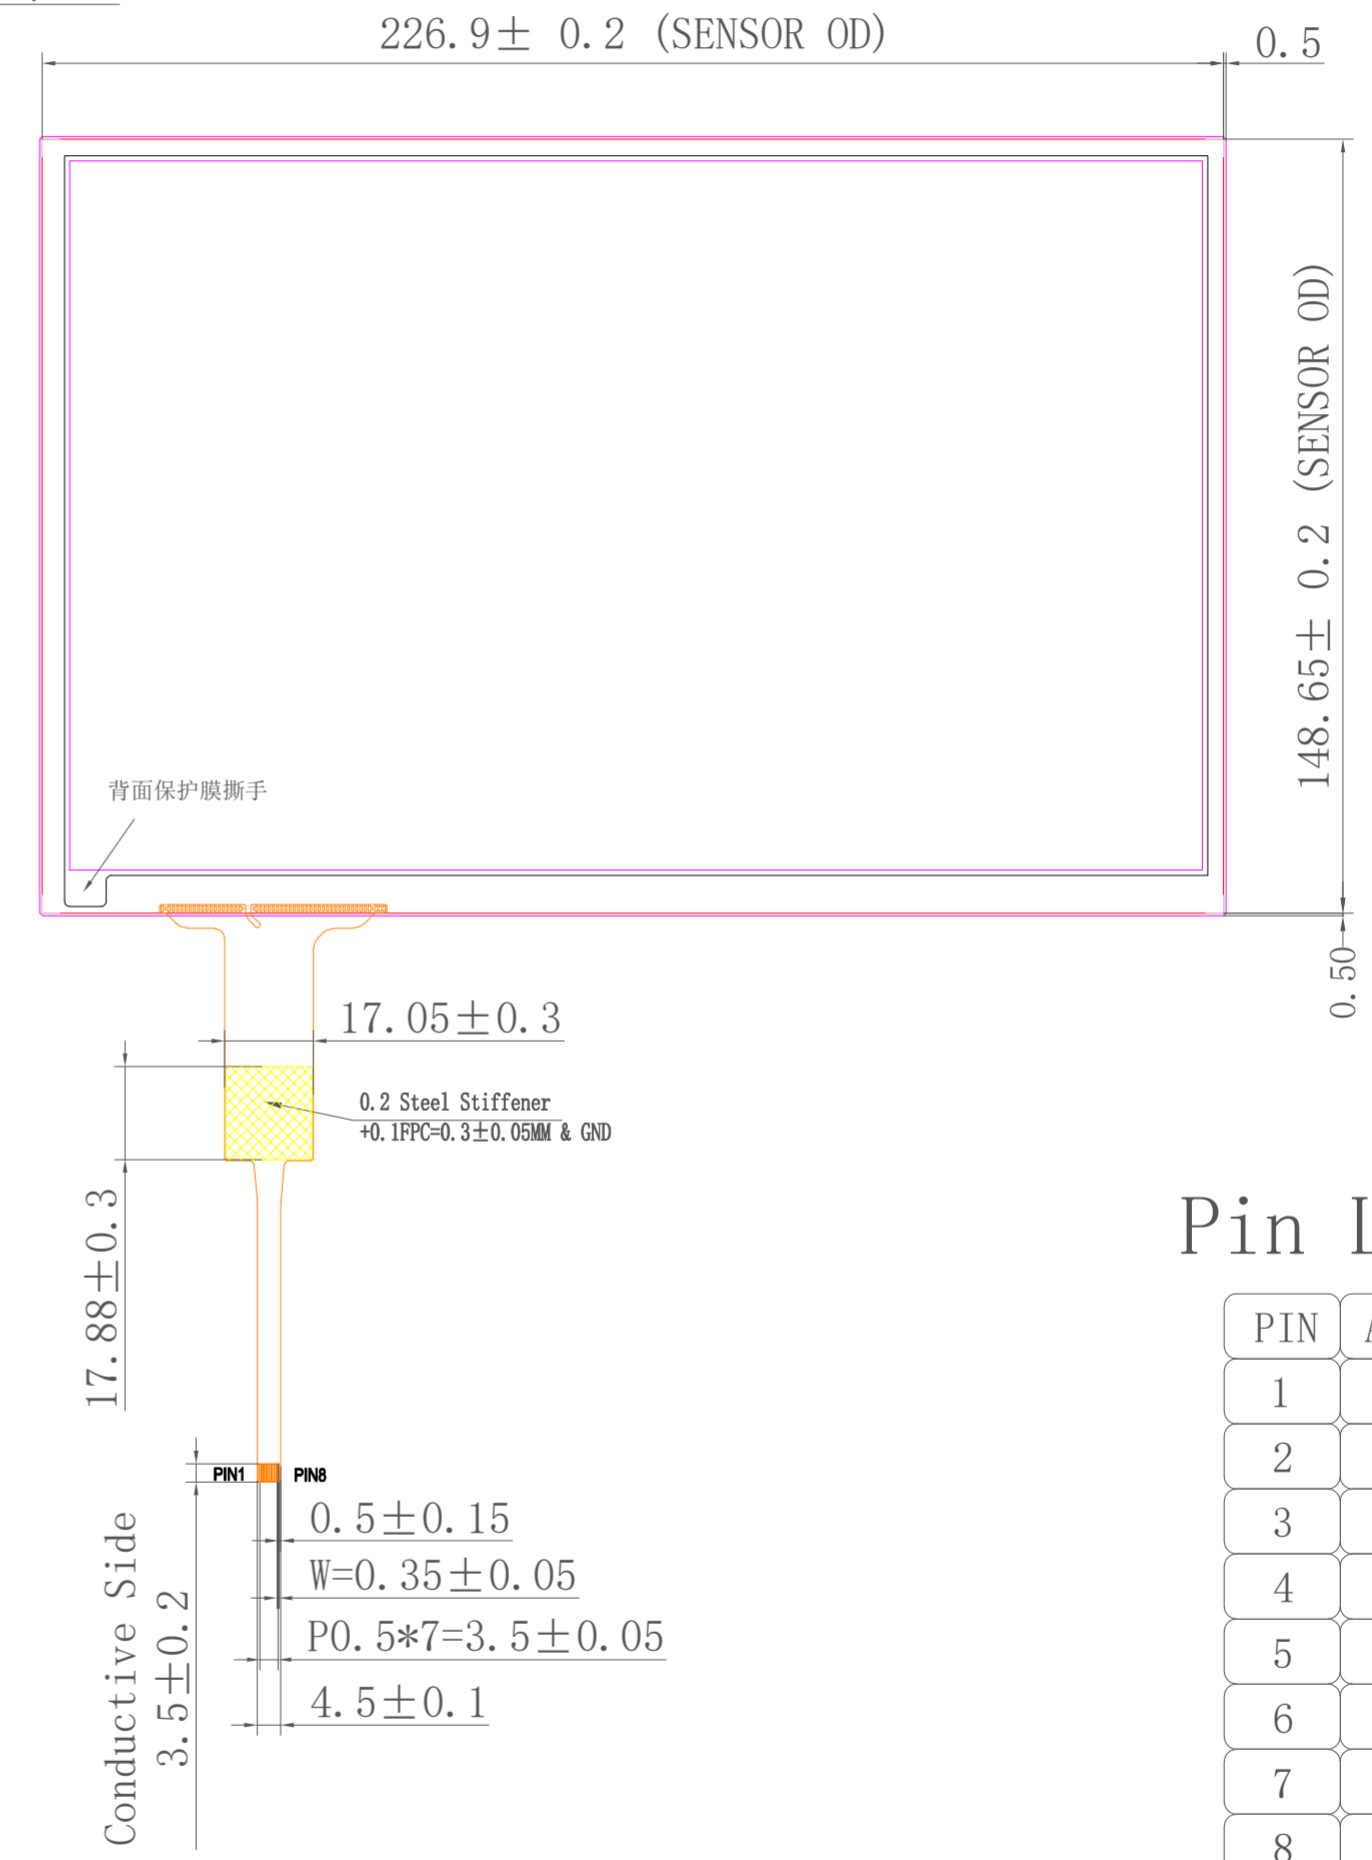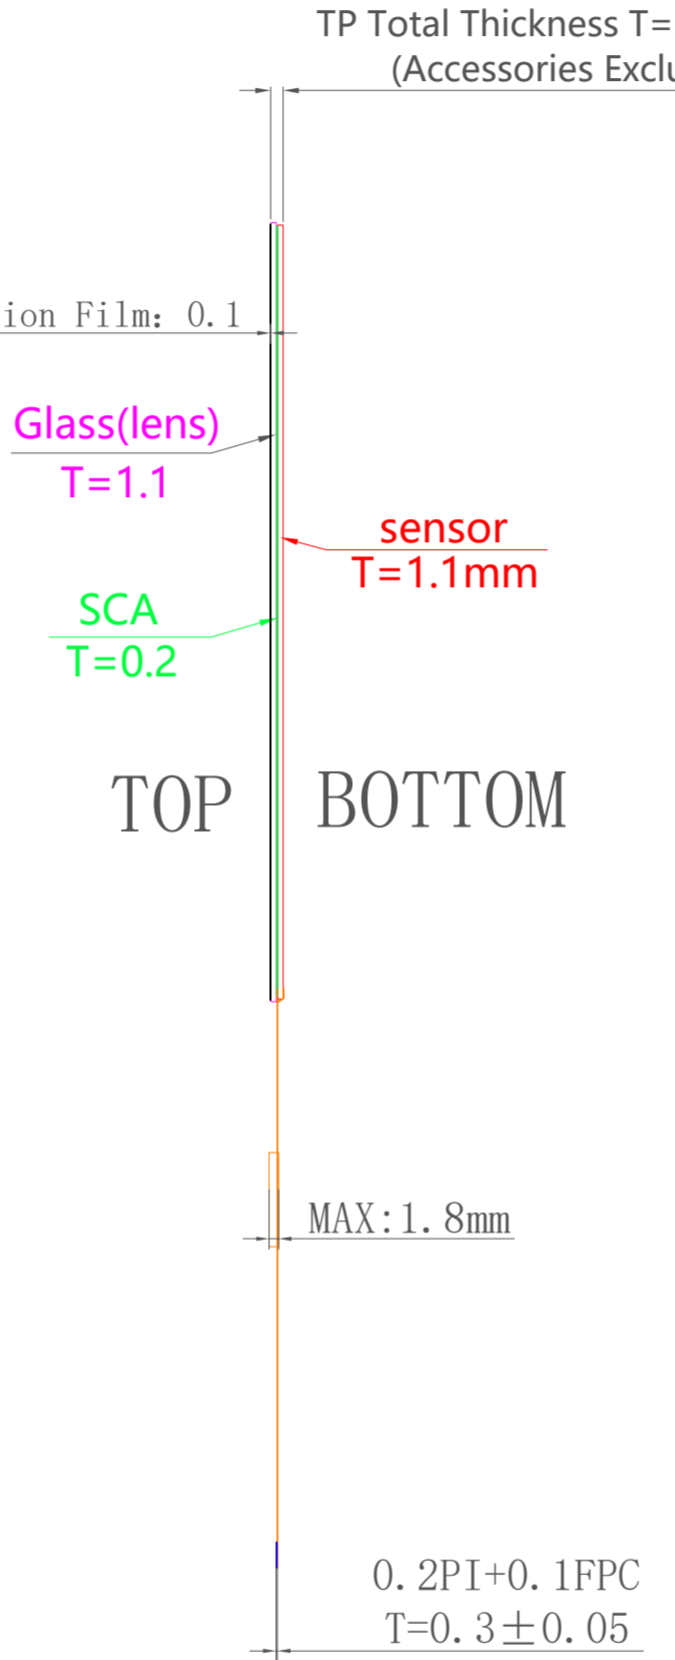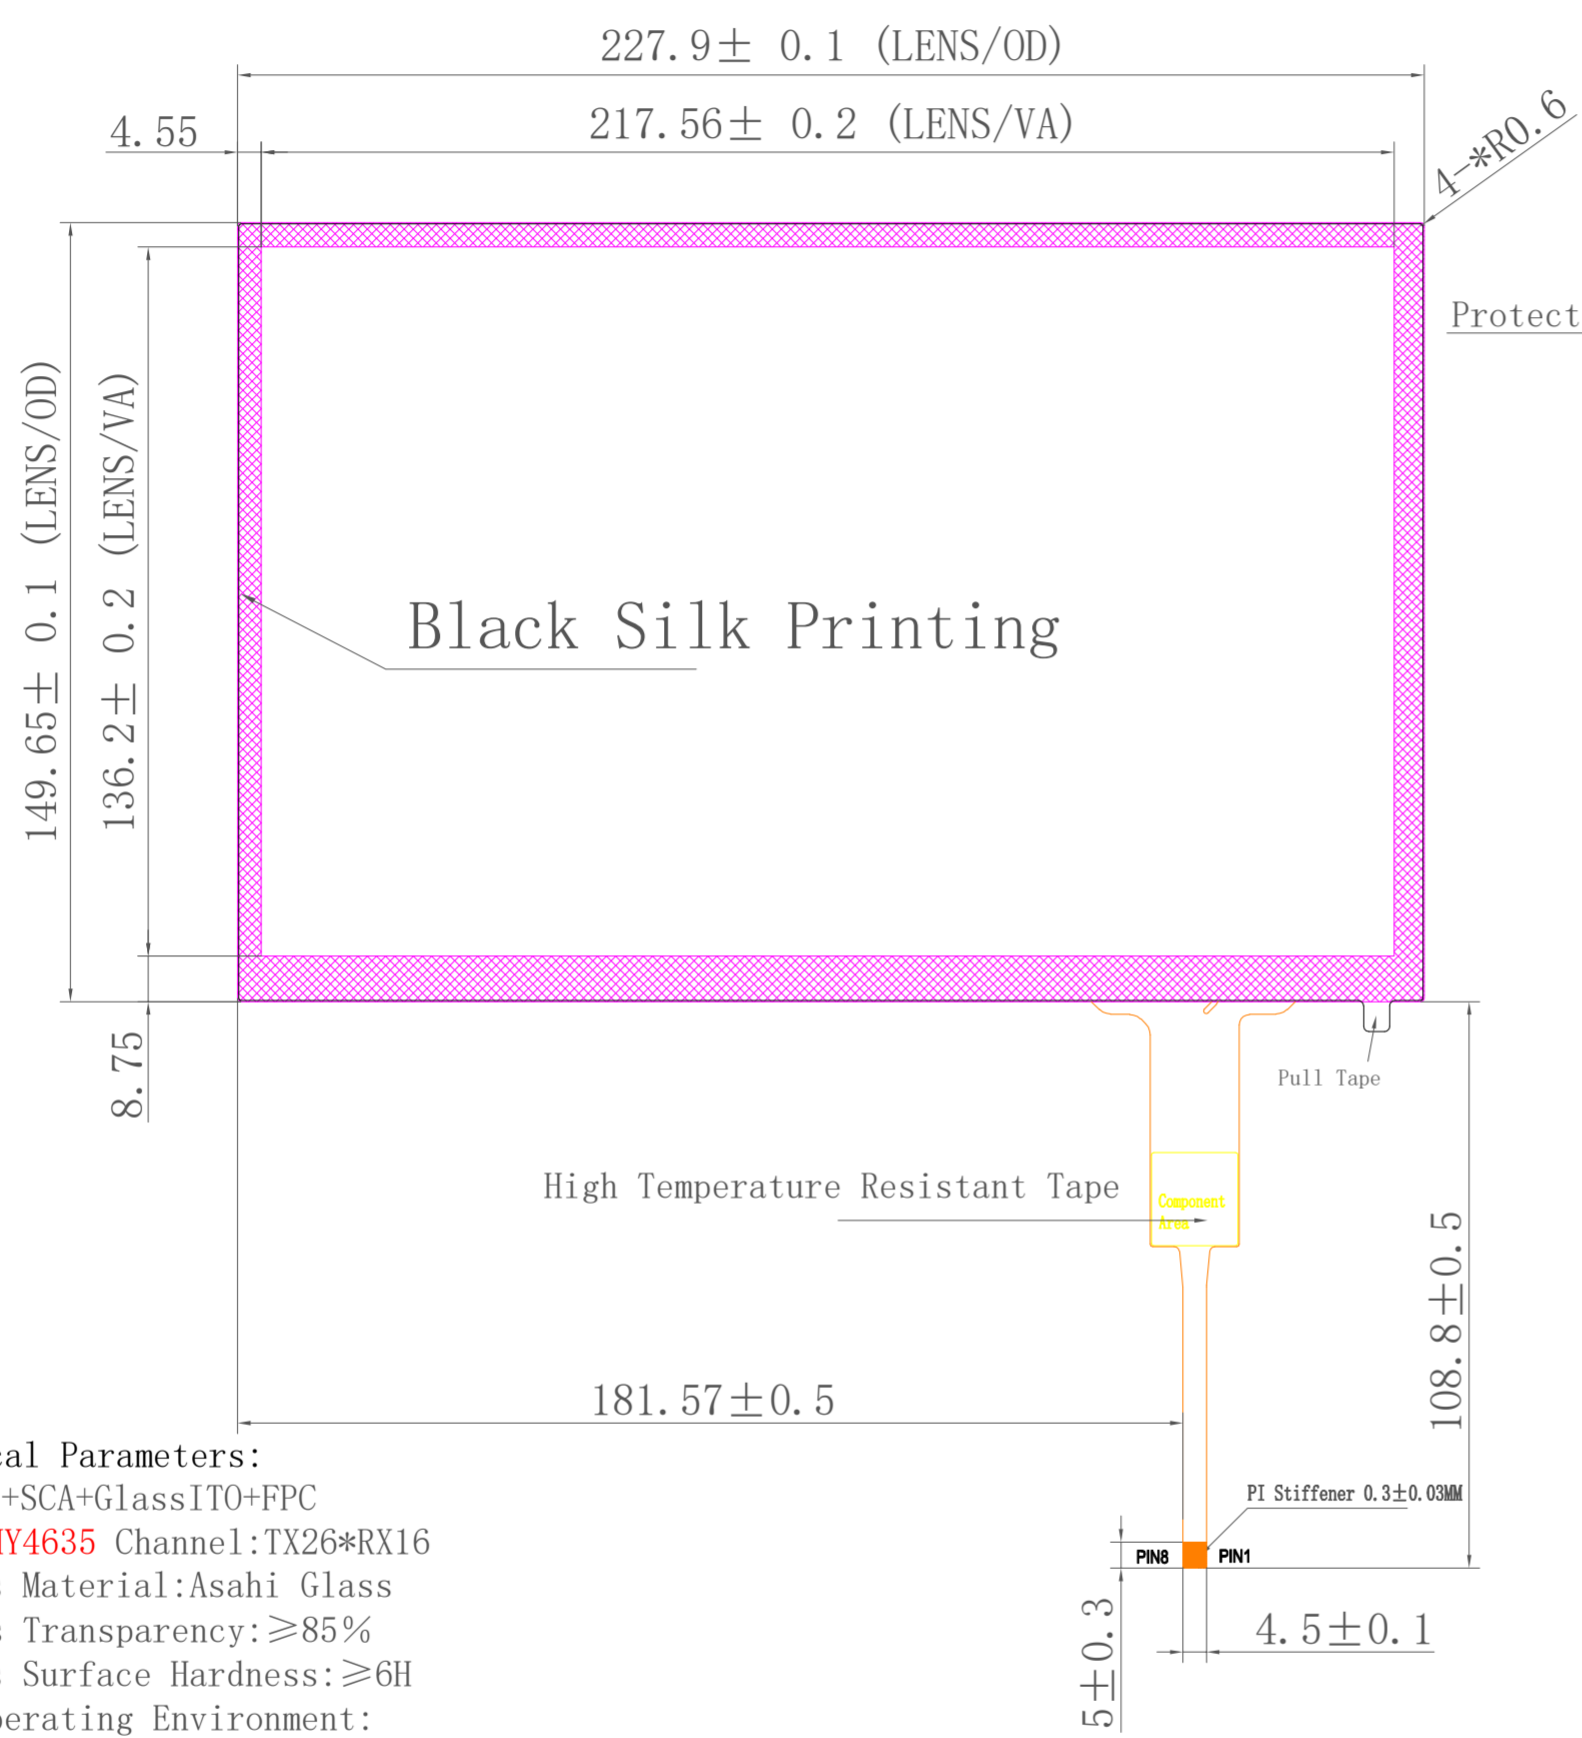

- Technical Parameters:**
1. GLASS+SCA+GlassITO+FPC
  2. COB:HY4635 Channel:TX26\*RX16
  3. Glass Material:Asahi Glass
  4. Glass Transparency:≥85%
  5. Glass Surface Hardness:≥6H
  6. TP Operating Environment:  
-20°C~+70°C, ≤90%RH
  7. TP Storage Environment:  
-30°C~+80°C, ≤90%RH
  8. ROHS Compliant
  9. Unmarked Tolerance:±0.2mm

(G+G Structure)

## Pin Logic

PIN	ASSIGNMENT
1	VDD
2	GND
3	RESET
4	SCL
5	SDA
6	INT
7	NC
8	NC

物料	NO.	更改内容	日期
	①		
	②		
	③		
	④		
	⑤		
	⑥		
	⑦		

工程确认图			MAXEN ELECTRONICS LIMITED			
方向			公司编号	HCT1731GG101A1J2-V0	未注公差	±0.20
绘图	审核	日期	客户编号		单位	mm
		20220822	版本号		比例	1 : 1