

1

2

3

4

5

6


D

C


B

A


### Front View

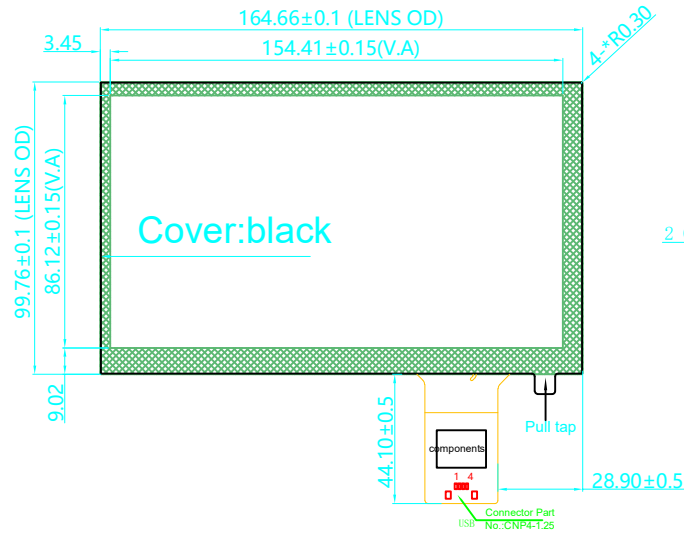

### Side View

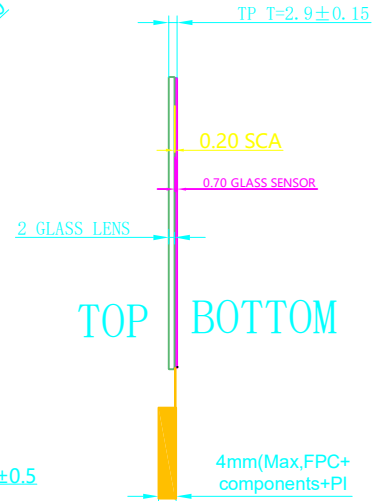

### Back View

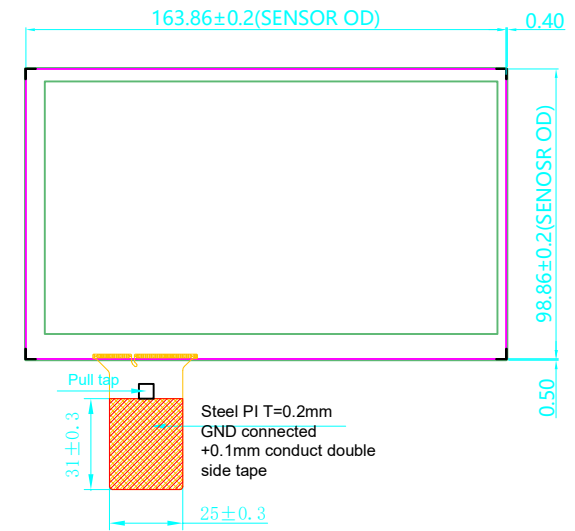

#### Parameters:


- 1.GLASS+SCA+GlassITO+FPC
- 2.COF: ILI2511
- 3.Glass material:AGC
- 4.Light transmittance rate ≥86%
- 5.Cover hardness≥6H
- 6.TP operation Temp.: -20°C~+70°C, ≤90%RH
- 7.TP storage temp.: -30°C~+80°C, ≤90%RH
- 8.ROHS compliance
- 9.Unmarked tolerance±0.2mm

#### USB-TP Interface:

PIN	Assignment
1	VDD
2	D-
3	D+
	GND

### Engineer Drawing

MAXEN ELECTRONICS LIMITED

Direction			Model No.	HCT1829GG070A1-V0	Tolerance	±0.20
Prepared By	Auditor	Date	Client No.		Unit	mm
			Date	2023-5-10	Ratio	1 : 1

1

2

3

4

5

6

D

C

B

A