




客户签名:

日期:

Front View

Side View

Back View

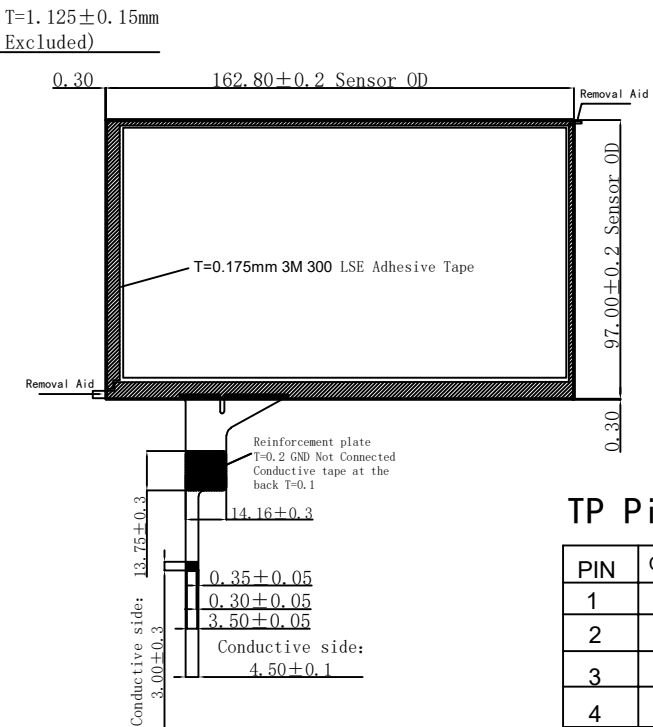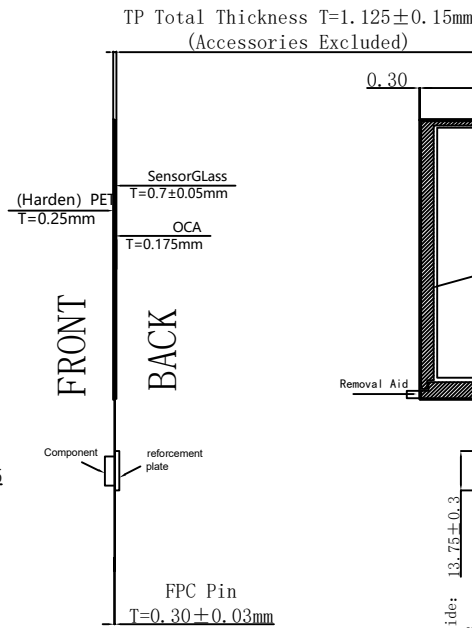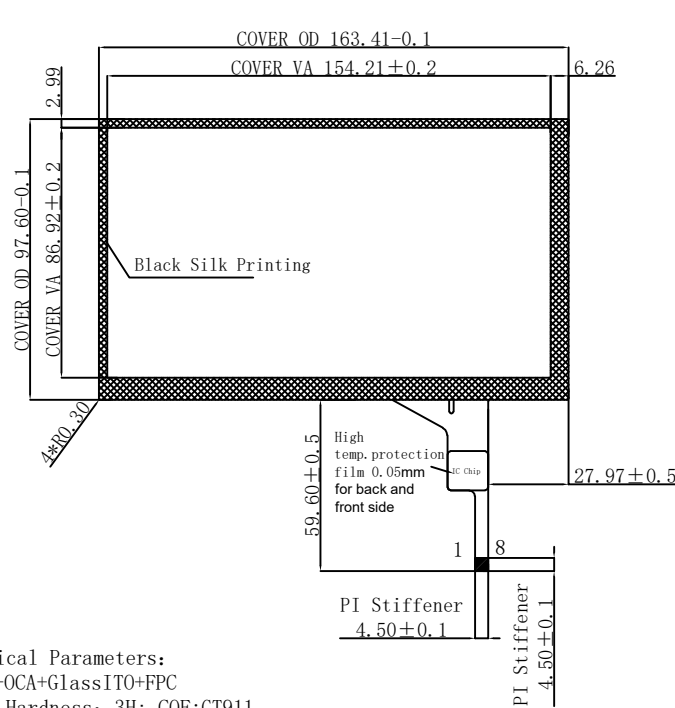

TP Pinout

PIN	Connection
1	GND
2	SCL
3	SDA
4	INT
5	RST
6	NC
7	VDD
8	NC

- Technical Parameters:
1. PET+OCA+GlassITO+FPC
 2. PET Hardness: 3H; COF:GT911
 3. Transparency: $\geq 86\%$
 4. TP Working Temp.: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$, $\leq 90\% \text{RH}$
 5. TP Storage Temp.: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\% \text{RH}$
 6. This product is ROHS compliant.
 7. Unmarked tolerance $\pm 0.2 \text{mm}$

(P+G Structure)

NO.		工程确认图		MAXEN ELECTRONICS LIMITED			
1	2	方向		公司编号	HCT1655PG070A1-V0	未注公差	± 0.20
3	4	绘图	审核	日期	客户编号	单位	mm
5	6			20220303	版本号	比例	1 : 1

1

2

3

4

5

6