

MAXEN ELECTRONICS LIMITED

Customer Code.:

SPECIFICATION OF BACKLIGHT

CUSTOMER'S P/N:

MX-B101FL401K-IM33


EDITION:

01

Date: 2022.05.27

Page: 1/1

THE THIRD ANGLE






FX'S P/N:
(include wrapper)

Approval (核准)

Check (检查)


Design (设计)

Laughing

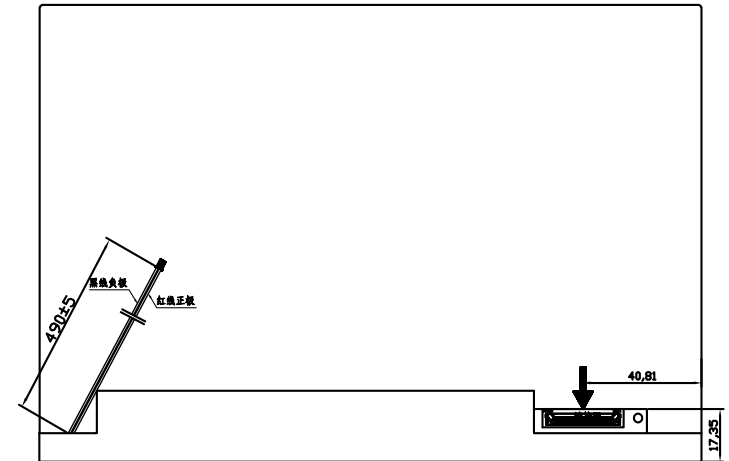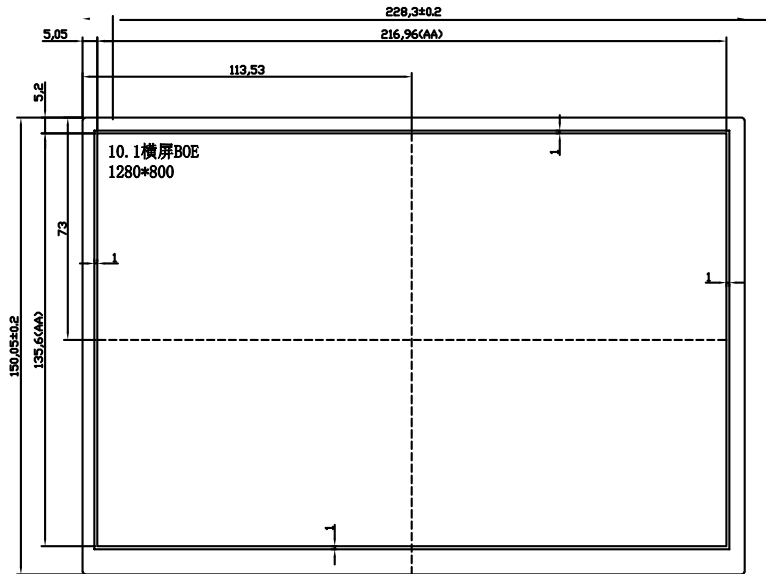

Notes:

1. Unit:mm.
2. Do not scale drawing.
3. All radii without dimension R0.2.
4. Modification Mark.
5. draft angle: 1°
6. Backlight luminance : 1000 cd/㎡
7. Luminance uniformity: 75%(min) (min/max*100%)
8. UnSpecified Tolerance is ±0.2
9. Operation conditions :If= 280-360mA, Vf=16.8-19.8V(MAX)
Color coordinate:X=0.27-0.35, Y=0.27-0.35
10. All materials comply with RoHS
11. The measured value of luminance and color coordinate bases FX's BM-7
12. Check item:1'9



NO.	TITLE	Quantity
11	FPC (软性线路板)	1
10	Double sided stick (双面胶)	2
9	HOUSING (塑胶框)	1
8	PCB(印制电路板)	1
7	Wire (导线)	1
6	LED (发光二极体)	36
5	BEF(增光片)	2
4	Diffuser film (扩散片)	1
3	Light guide plate (导光板)	1
2	Reflector film (反射膜)	1
1	Rear iron frame (下铁框)	1

REV	DATE	DESCRIPTION (修改内容)	REVISER

Customer: 客户	Approval Date: 确认日期	Approve by: 确认
-----------------	------------------------	-------------------