
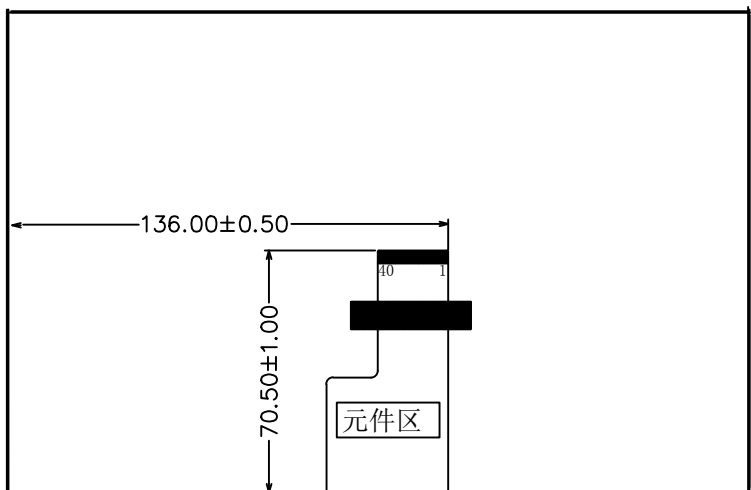


MAXEN ELECTRONICS LIMITED

Email: sales@maxen-electronics.com Http://www.maxen-electronics.com

4.Outline.Drawing

REV	DESCRIPTION	DATE
A	初版	2018.12.27

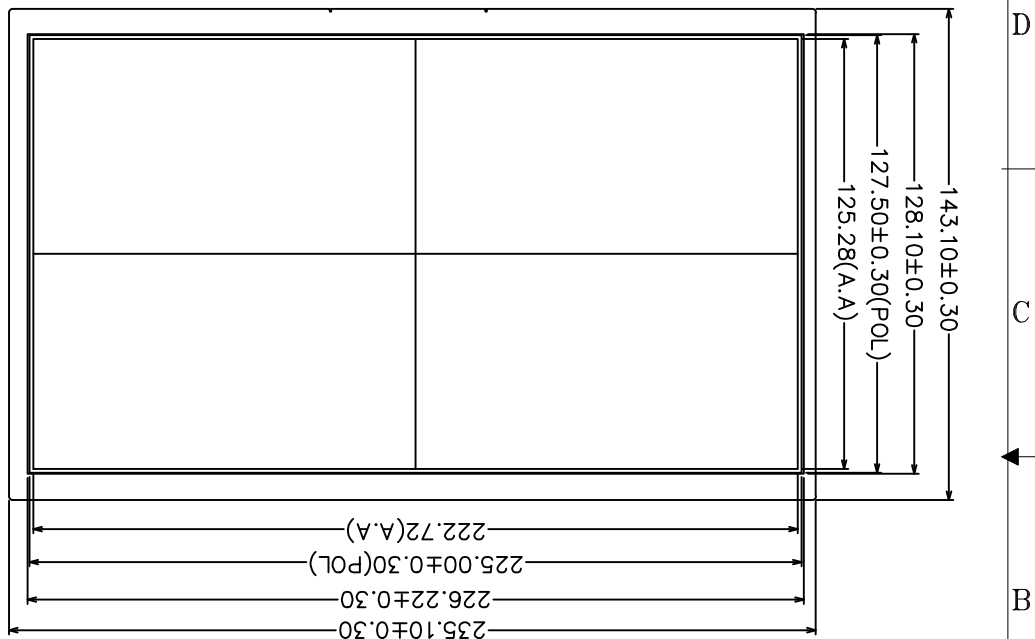

Specification:


- 1). Display mode: 16.7M, TFT/Transmissive
- 2). Operating temp.: $-20^{\circ}\text{C}\sim+70^{\circ}\text{C}$
Storage temp.: $-30^{\circ}\text{C}\sim+80^{\circ}\text{C}$
- 3). Backlight:
- 4). Dimensions with mark "*" are important, with mark "()" are referenced

MAXEN ELECTRONICS LIMITED			
TITLE:	ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE: ± 0.2	
MODULE NO.:	MX-B101HL40-IS24651	REV	A
DRAWN BY:		DATE:	PROJECTION:
CHECKED BY:		DATE:	SCALE: N. T. S UNIT: mm
APPROVED BY:		DATE:	SHEET: 1 OF 1


PIN	SYMBOL
1	VCOM
2	VDD
3	VDD
4	NC
5	RESET
6	STBY
7	GND
8	NC
9	PNDD
10	GND
11	PNDD
12	PNDD
13	GND
14	PNDD
15	PNDD
16	GND
17	NC
18	PNDD
19	GND
20	PNDD
21	PNDD
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	SHR
34	UPIN
35	VGL
36	NC
37	NC
38	VGH
39	LED+
40	LED+

客户签名:
日期:


FRONT VIEW

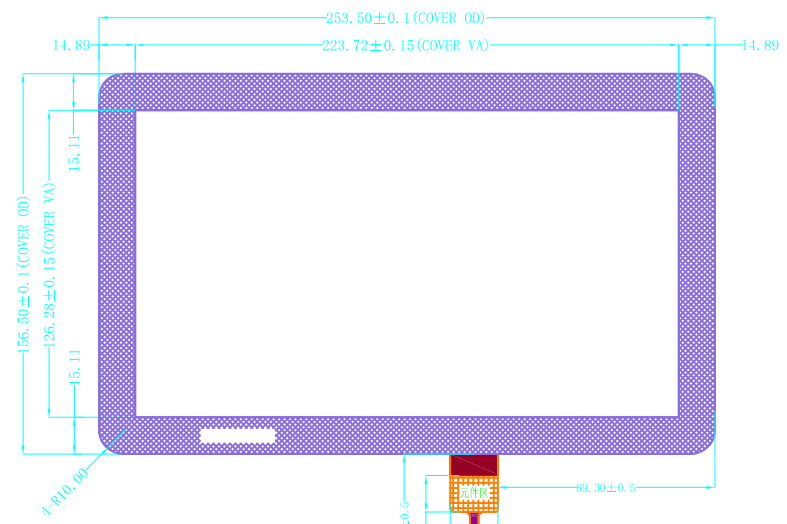

SIDE VIEW

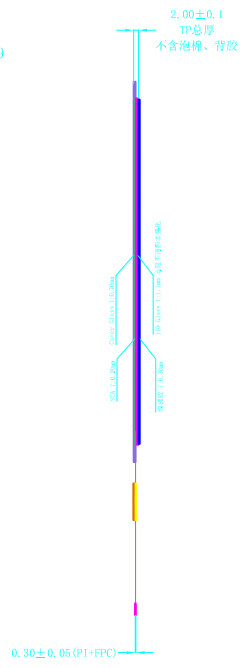

BACK VIEW

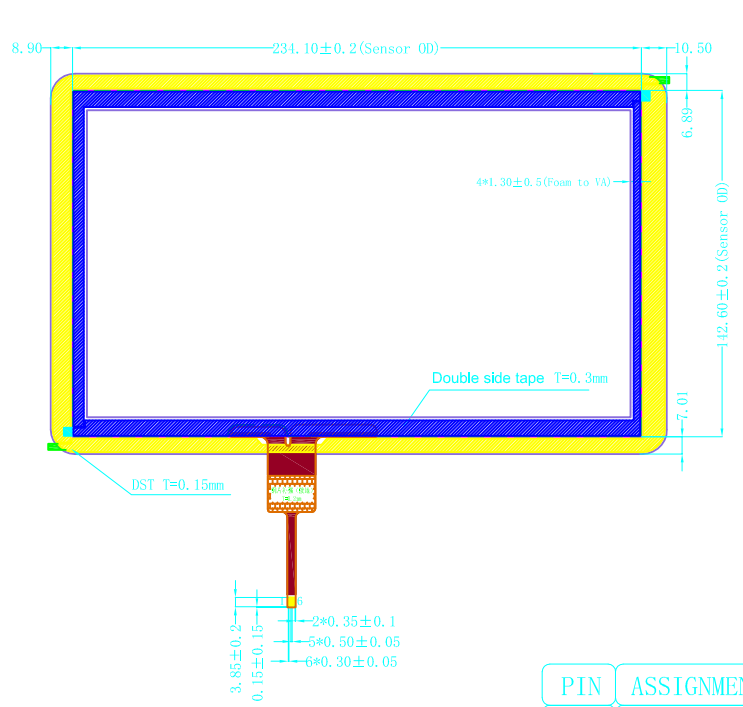

Technical parameters:
1. Structurer:G+G
Cover Glass:0.70mm
SCA:0.20mm
ITO SENSOR:1.1mm GT9271
FPC (PINCH=0.5mm)
Total Thickness:2.0 ± 0.1mm
2.Working volt.:2.8-3.3 V
3.Transparency ≥ 82%
4.Surface Hardness:6H
5.Working temp.: -20℃ ~ +70℃, ≤ 90%RH
6.Storage temp. -30℃ ~ +80℃, ≤ 90%RH
7.Unmarked tolerance ± 0.2mm

TX31*RX17

PIN	ASSIGNMENT
1	RESET
2	SDA
3	SCL
4	INT
5	VDD(3.3V)
6	GND

物料	NO.	更改内容	日期

工程确认图

MAXEN ELECTRONICS LIMITED

公司编号	HCT651GG101F-V0	未注公差	±0.20
客户编号		单位	mm
版本号		比例	1 : 1