



# Outline Drawing

MX-B70HR50-IS471K

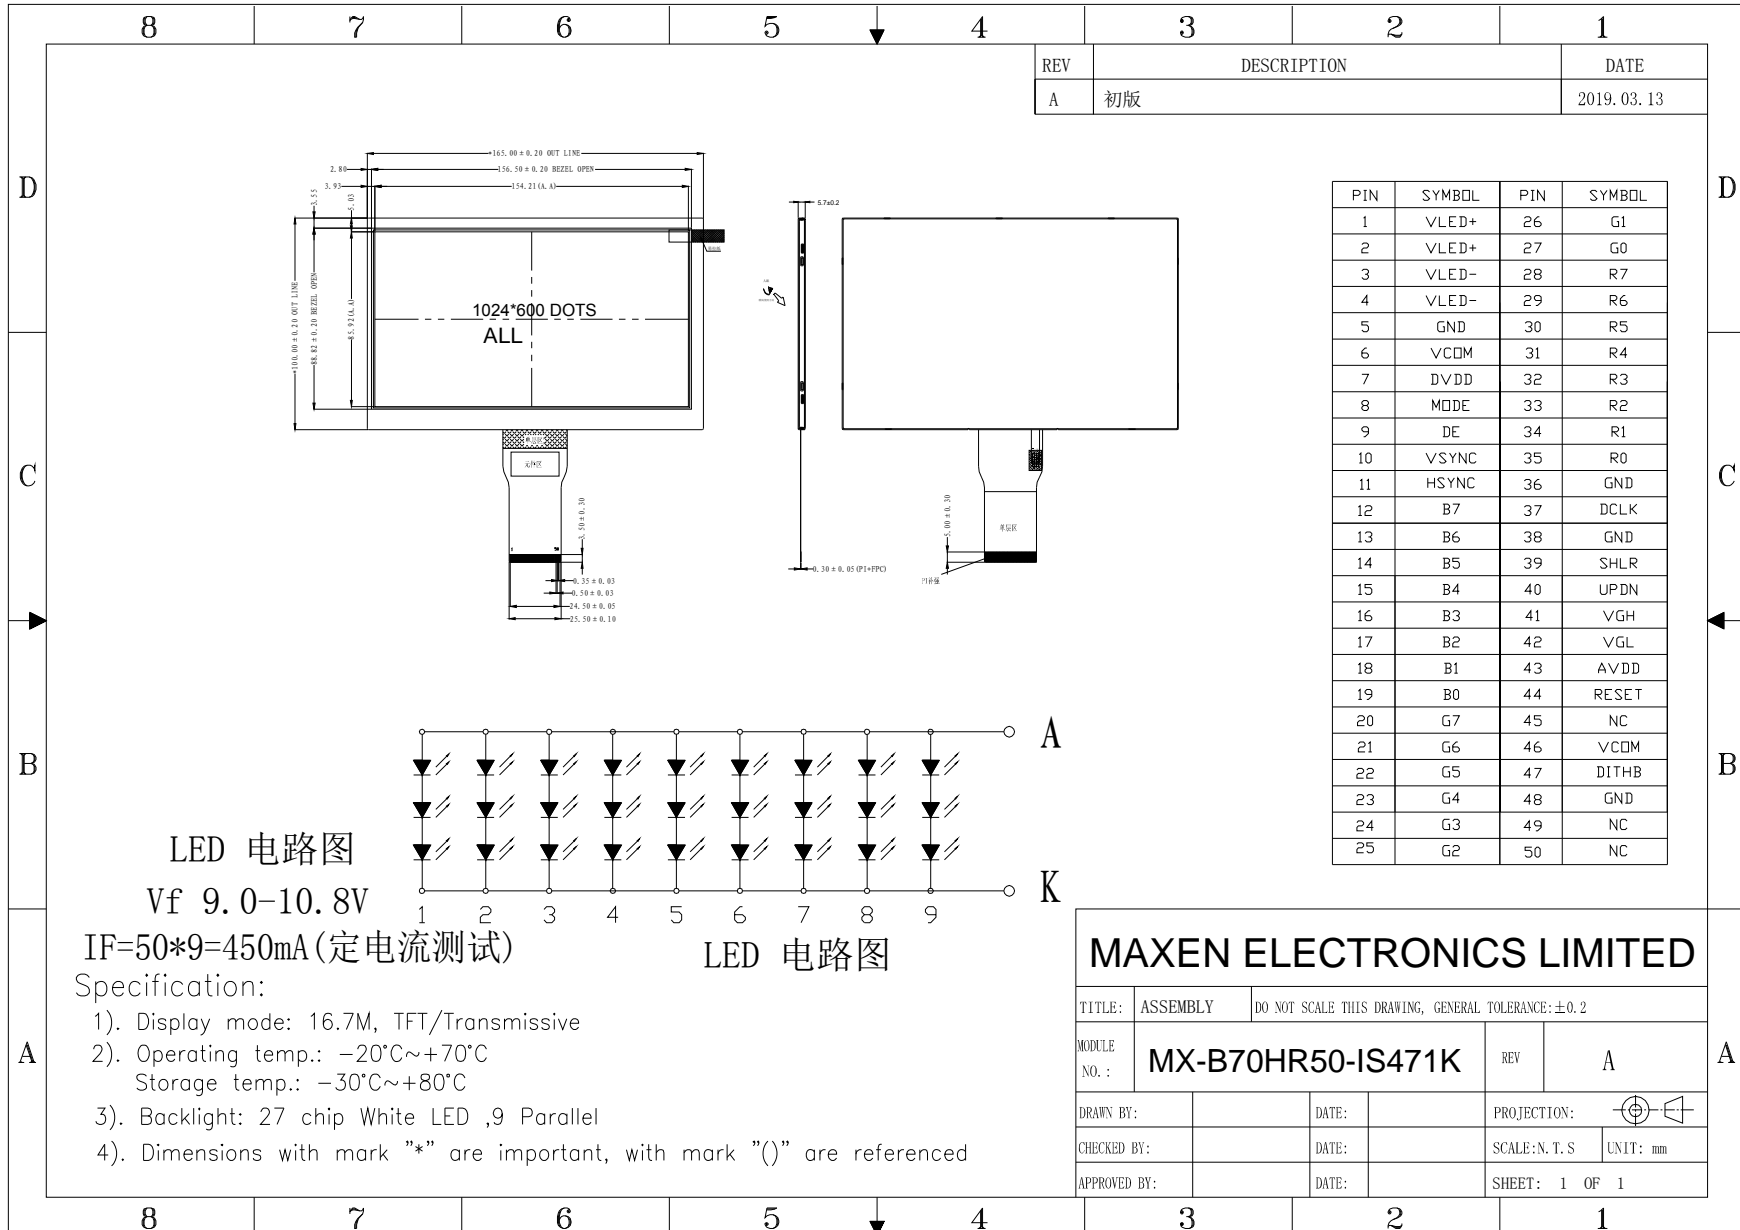


Ver	Date	History	Name
A0	2019.07.31	新项目	Jason


### FRONT VIEW

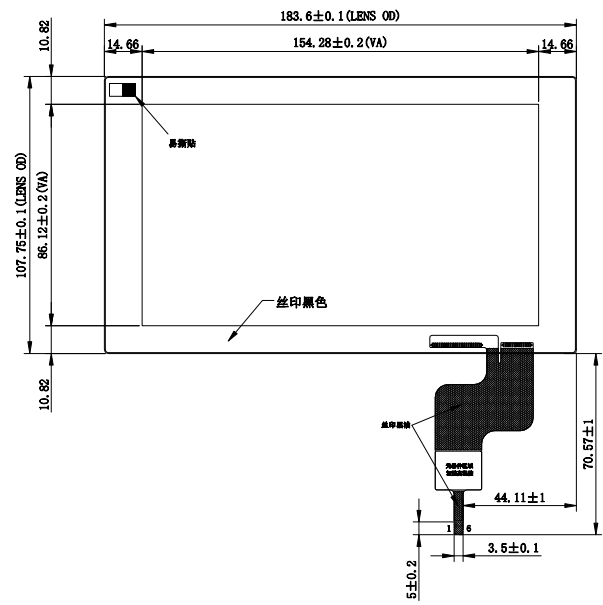

### SIDE VIEW

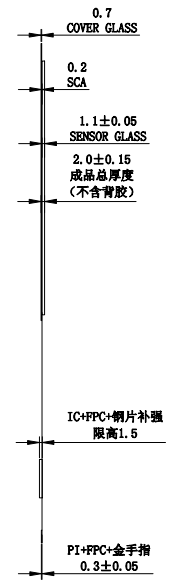

### BACK VIEW

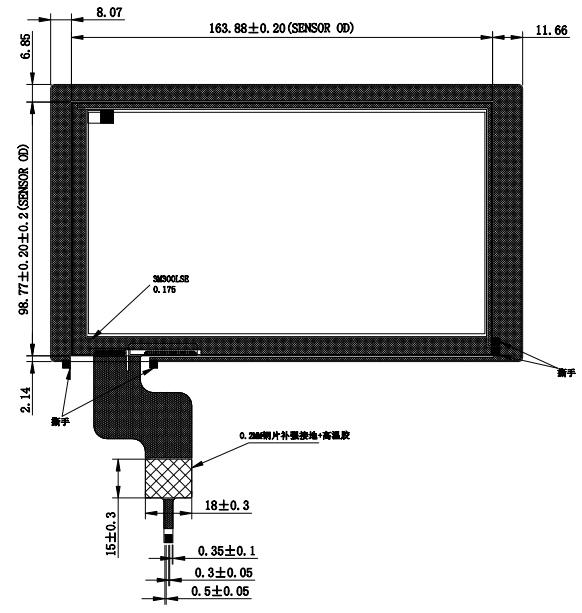

Item	Specification
1. Type	G+G
2. Operating Voltage	1.8V~3.5V
3. Operation Temperature	-20°C~70°C
4. Storage Temperature	-30°C~80°C
5. Connect Material	FPC
6. Response Time	≤25ms
7. Light Transparency	70%~80% Min.
8. Surface Hardness	6H(Pencil)

NOTES:  
 1. The General Torlance is ±0.20mm.  
 2. All materials in the drawing Comply with the RoHS.

pin num	dif
1	RST
2	VDD
3	GND
4	INT
5	SDA
6	SCL

**MAXEN ELECTRONICS LIMITED**

HCT-7077A-V0		Unit	Scale	Sheet	PRO(3)
Customer NO:		mm	1:1	1/1	
Date	Material	APPROVED	CHECKED	DRAWN	
2019.07.31					

