



Rev.	Revision Record	制作	日期
AO	首次发行	Y	2021-05-06


Front View

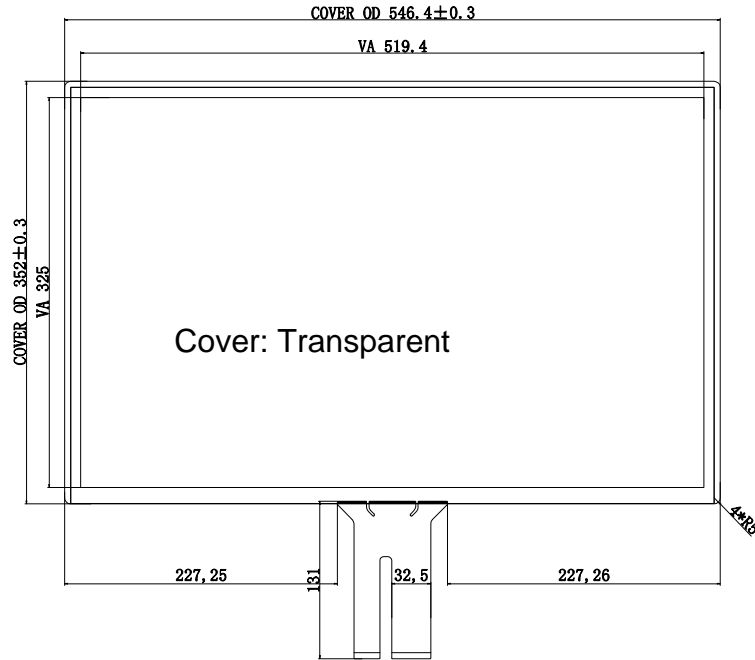

Side View

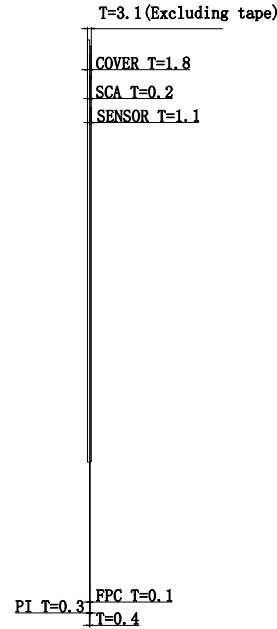


Back View

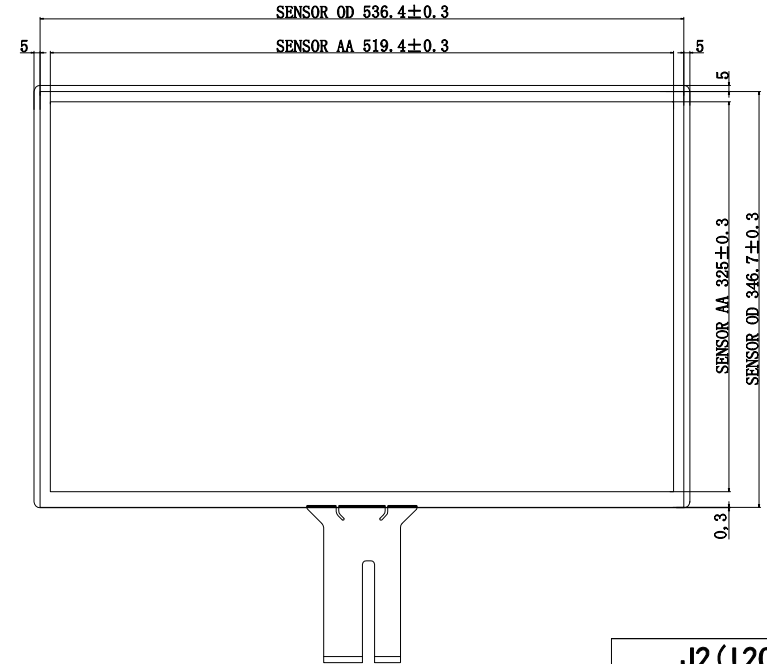

Technical Parameter:

1. TP Structure: G+G;
2. TP type: COB; IC: ILI2510  
HA2510P.P3.C3 64\*42P Working volt.: 5V
3. Transparence rate  $\geq 85\%$
4. Surface Hardness  $> 6H$
5. Working temp.:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$ ,  $\leq 85\%RH$
6. Storage temp.:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$ ,  $\leq 85\%RH$
7. Unmarked tolerance  $\pm 0.5\text{mm}$
8. ROHS compliance

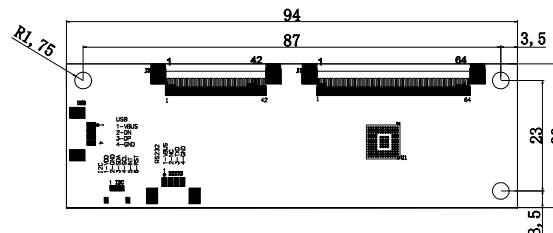

		J2 (I2C)	
		PIN	Interface
		1	VDD3. 3
PIN	Interface	2	GND
1	VDD/5V	3	SDA
2	D-	4	SCL
3	D+	5	INT
4	GND	6	RST

MAXEN ELECTRONICS LIMITED				
TITLE: 产品编号	MX24000H-AAA			
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式
Checked By: 审核		Unit: 单位	mm	
Approved By:		Date: 日期	2021.05.06	Scale: 比例
				1:1