



Email: melody.xia@maxen-icdisplays.com [Http://www.maxen-icdisplays.com](http://www.maxen-icdisplays.com)

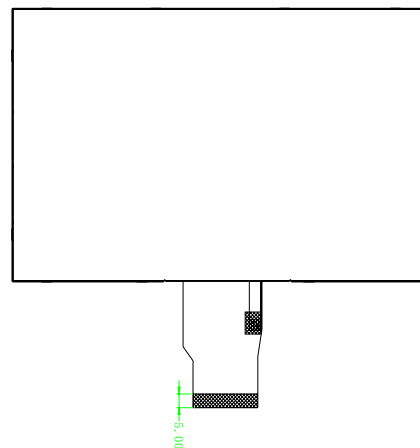

No.	Pin name	No.	Pin name
1	A1	33	R2
2	A2	34	R1
3	K1	35	R0
4	K2	36	GND
5	GND	37	DCL
6	VCOM	38	GND
7	DVDD	39	L/R
8	MODE	40	U/D
9	DE	41	VGH
10	VS	42	VGL
11	HS	43	AVDD
12	B7	44	RESET
13	B6	45	NC
14	B5	46	VCOM
15	B4	47	DITHE
16	B3	48	GND
17	B2	49	NC
18	B1	50	NC
19	B0		
20	G7		
21	G6		
22	G5		
23	G4		
24	G3		
25	G2		
26	G1		
27	G0		
28	R7		
29	R6		
30	R5		
31	R4		
32	R3		

Note:	
LCD TYPE	7 inch TFT Transmissive
DISPLAY MODE	Normally white
VIEW DIRECTION	6 O'clock
OPERATING TEMP.	-20° C ~ 70° C
STORAGE TEMP.	-30° C ~ 80° C
BACK LIGHT	18 White leds
BL voltage/current	9.6V / 120mA
ALL MATERIALS MUST BE ROHS COMPLIANT	



UNIT: mm	SCALE: NO SCALE	SIZE: A4		MAXEN ELECTRONICS LIMITED	
GENERAL TOLERANCE: ±0.2 Angle=1°					
DESIGNED:	CZS	Date 2019-10-28	PART NAME	MODULE DRAWING	
CHECKED:		Date	PROJECT NO.	MX-B70NR50-TNX64	SHEET: 1/1
APPROVED:		Date	PART NO.		REV: A