


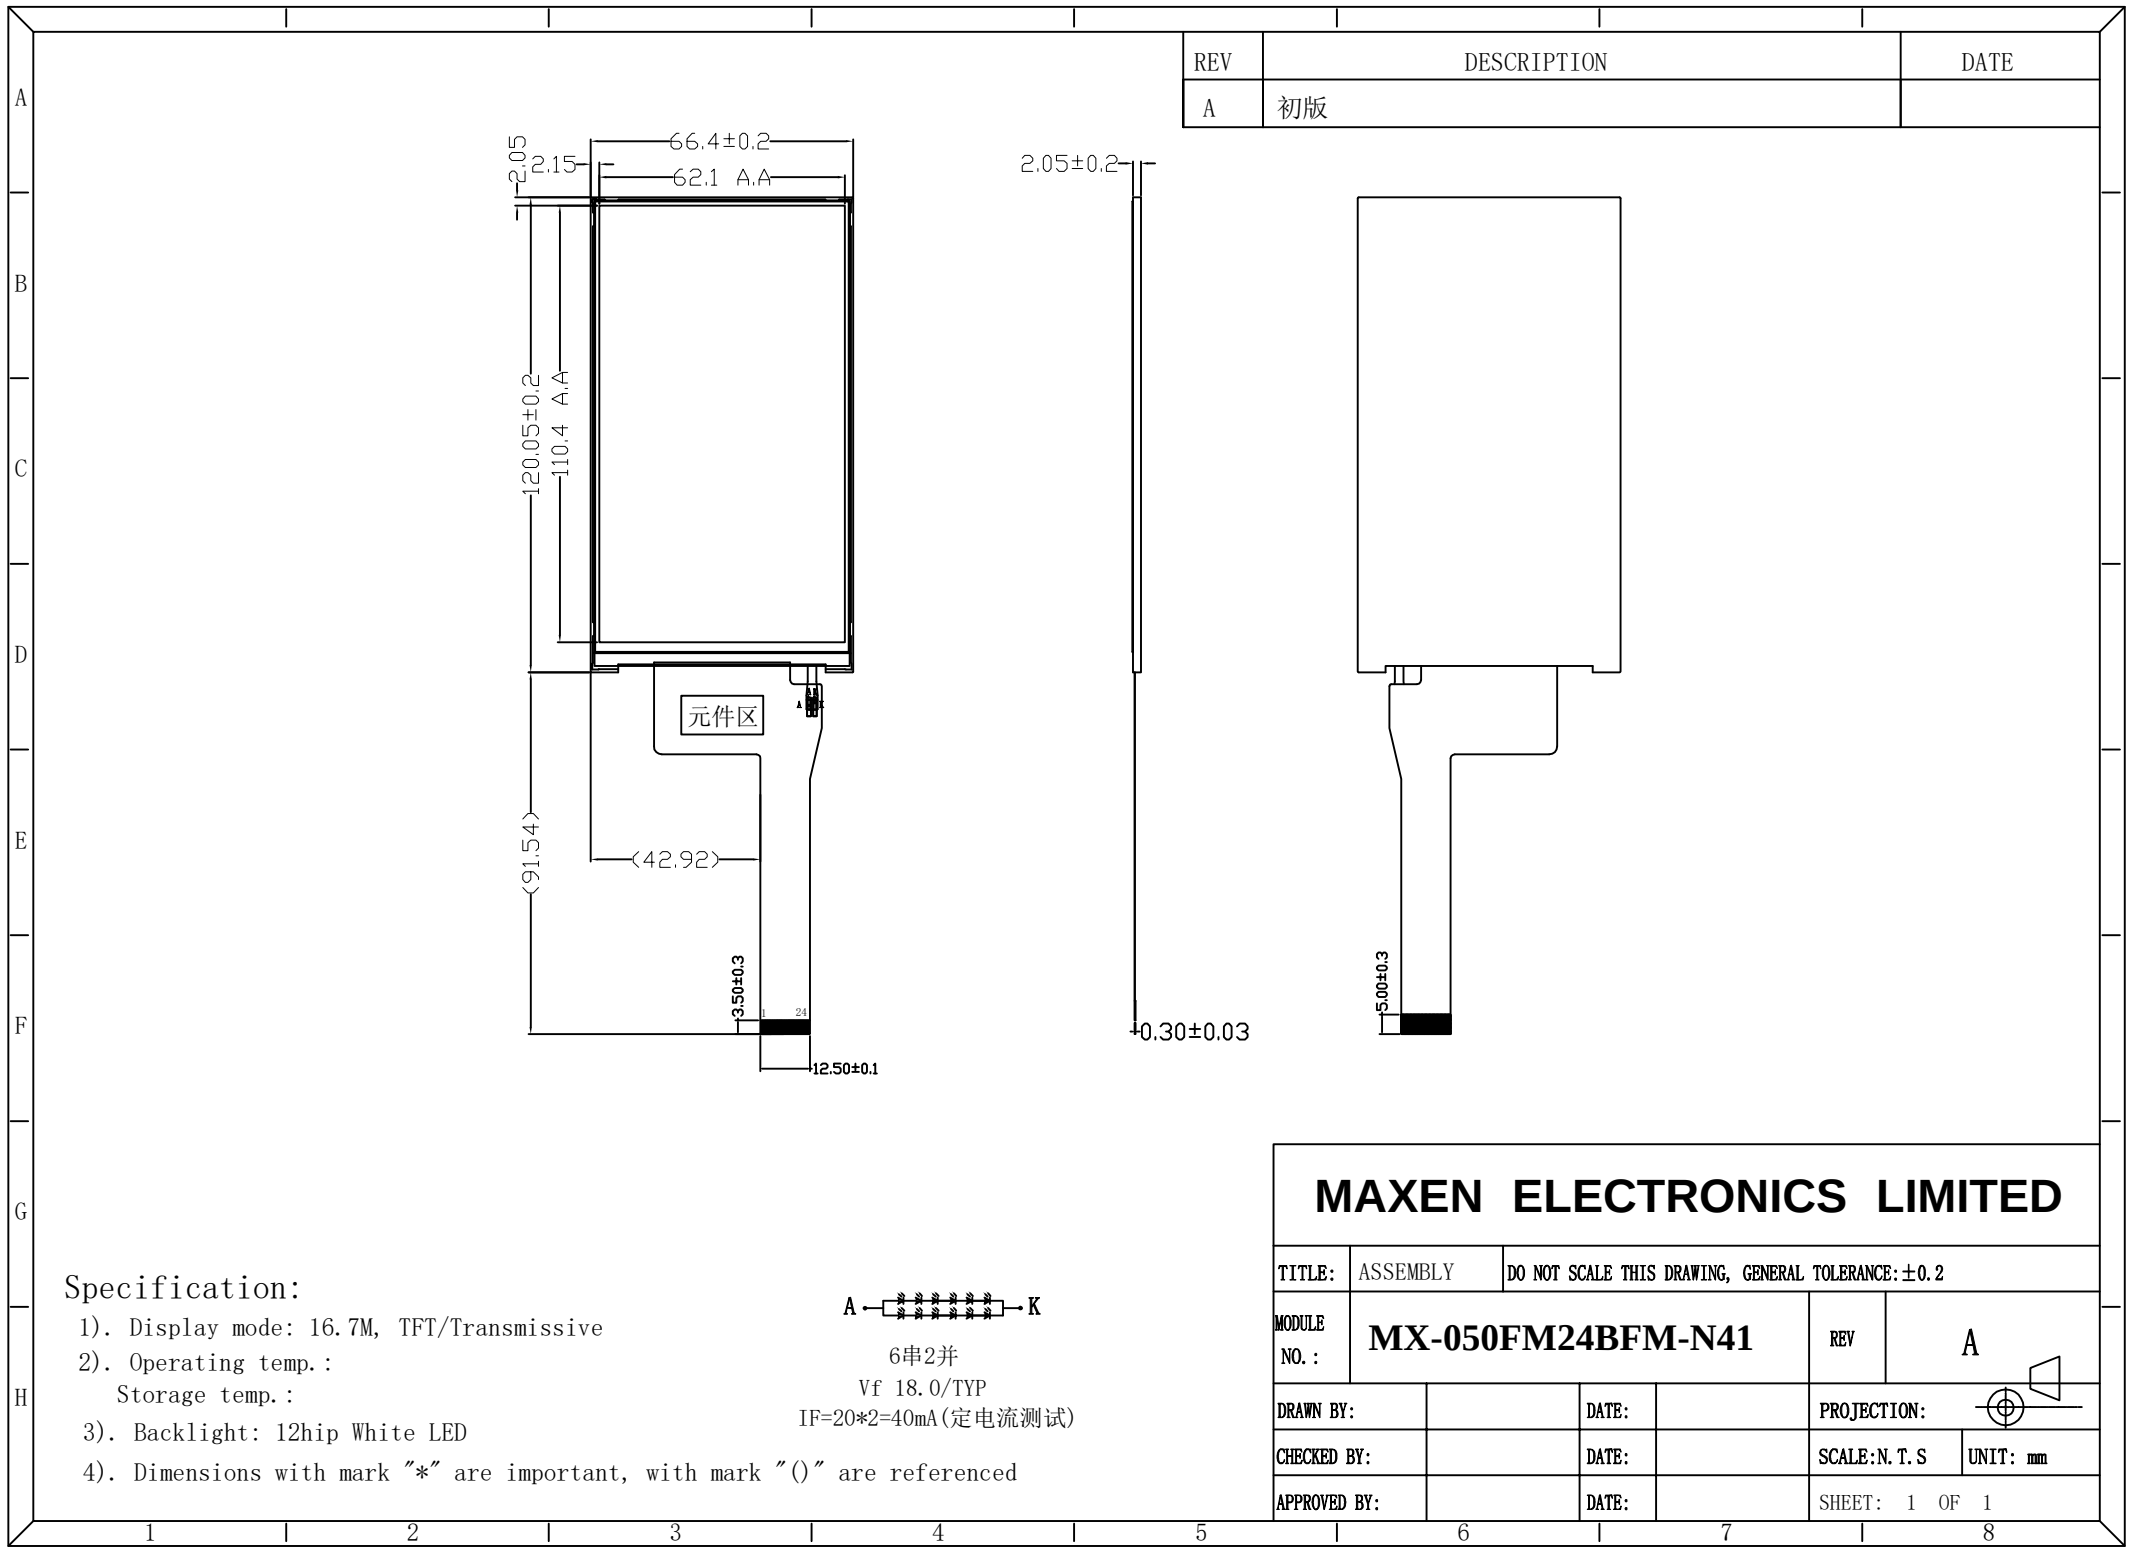

客户签名:


日期:

Cover Glass

Front View


Side View

Back View

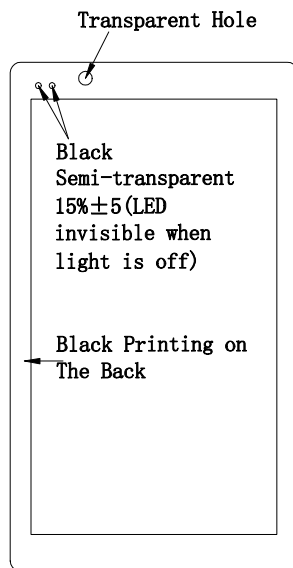

Technical Parameters:

1. CG+ITO GLASS+FPC
CG: 0.7mm Asahi Glass
GLASS sensor: 0.55mm
Total Thickness: 1.4 ± 0.15
IC: GT911(10*15)
2. Operating Voltage: 2.8V-3.3 V
3. Transparent: $\geq 85\%$
4. Hardness: 6H
5. Operating Temperature: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$, $\leq 90\% \text{RH}$
6. Storage Temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\% \text{RH}$
7. Unmarked Tolerance: ± 0.2

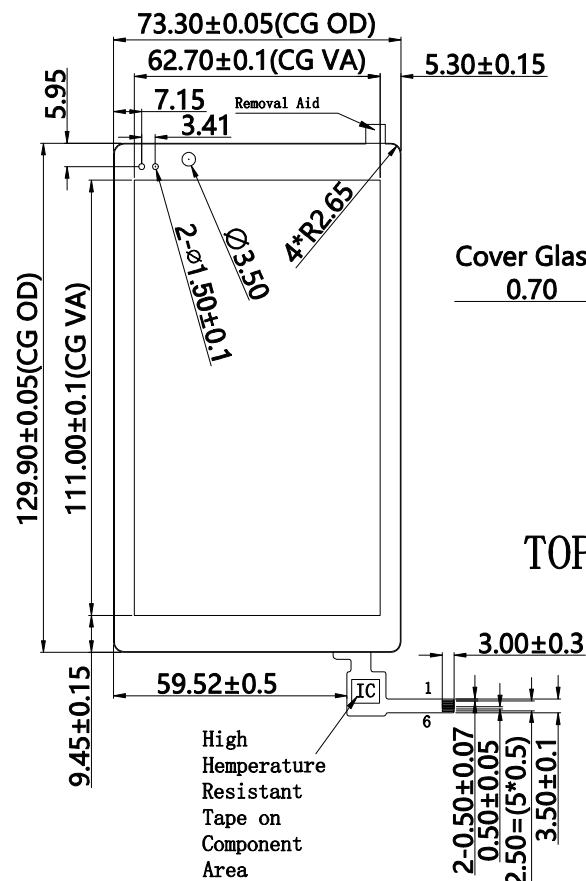


Cover Glass:
0.70

LOCA: 0.15

ITO Glass:
0.55

TOP

BOTTOM

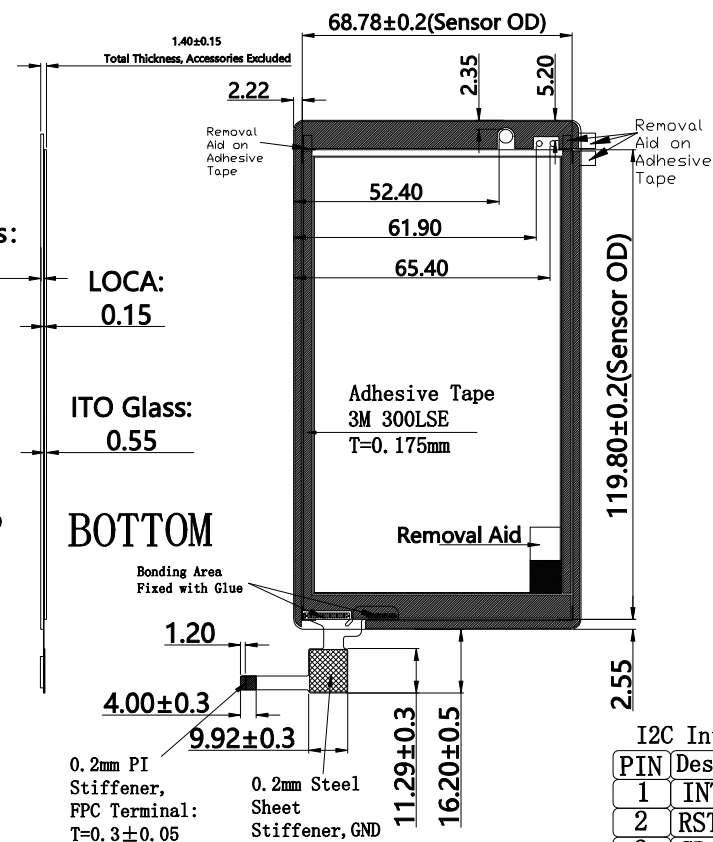

(G+G Structure)

I2C Interface

PIN	Description
1	INT (1.8V)
2	RST (1.8V)
3	SDA (1.8V)
4	SCL (1.8V)
5	GND
6	VDD (2.8V)

物料	NO.	更改内容	日期	工 程 确 认 图			MAXEN ELECTRONICS LIMITED			
	①									
	②			方向		公司编号	HCT1022GG050A1-V1	未注公差	±0.20	
	③									
	④			绘图	审核	日期	客户编号		单位	mm
	⑤									
	⑥					20210413	版本号		比例	1 : 1
	⑦									