




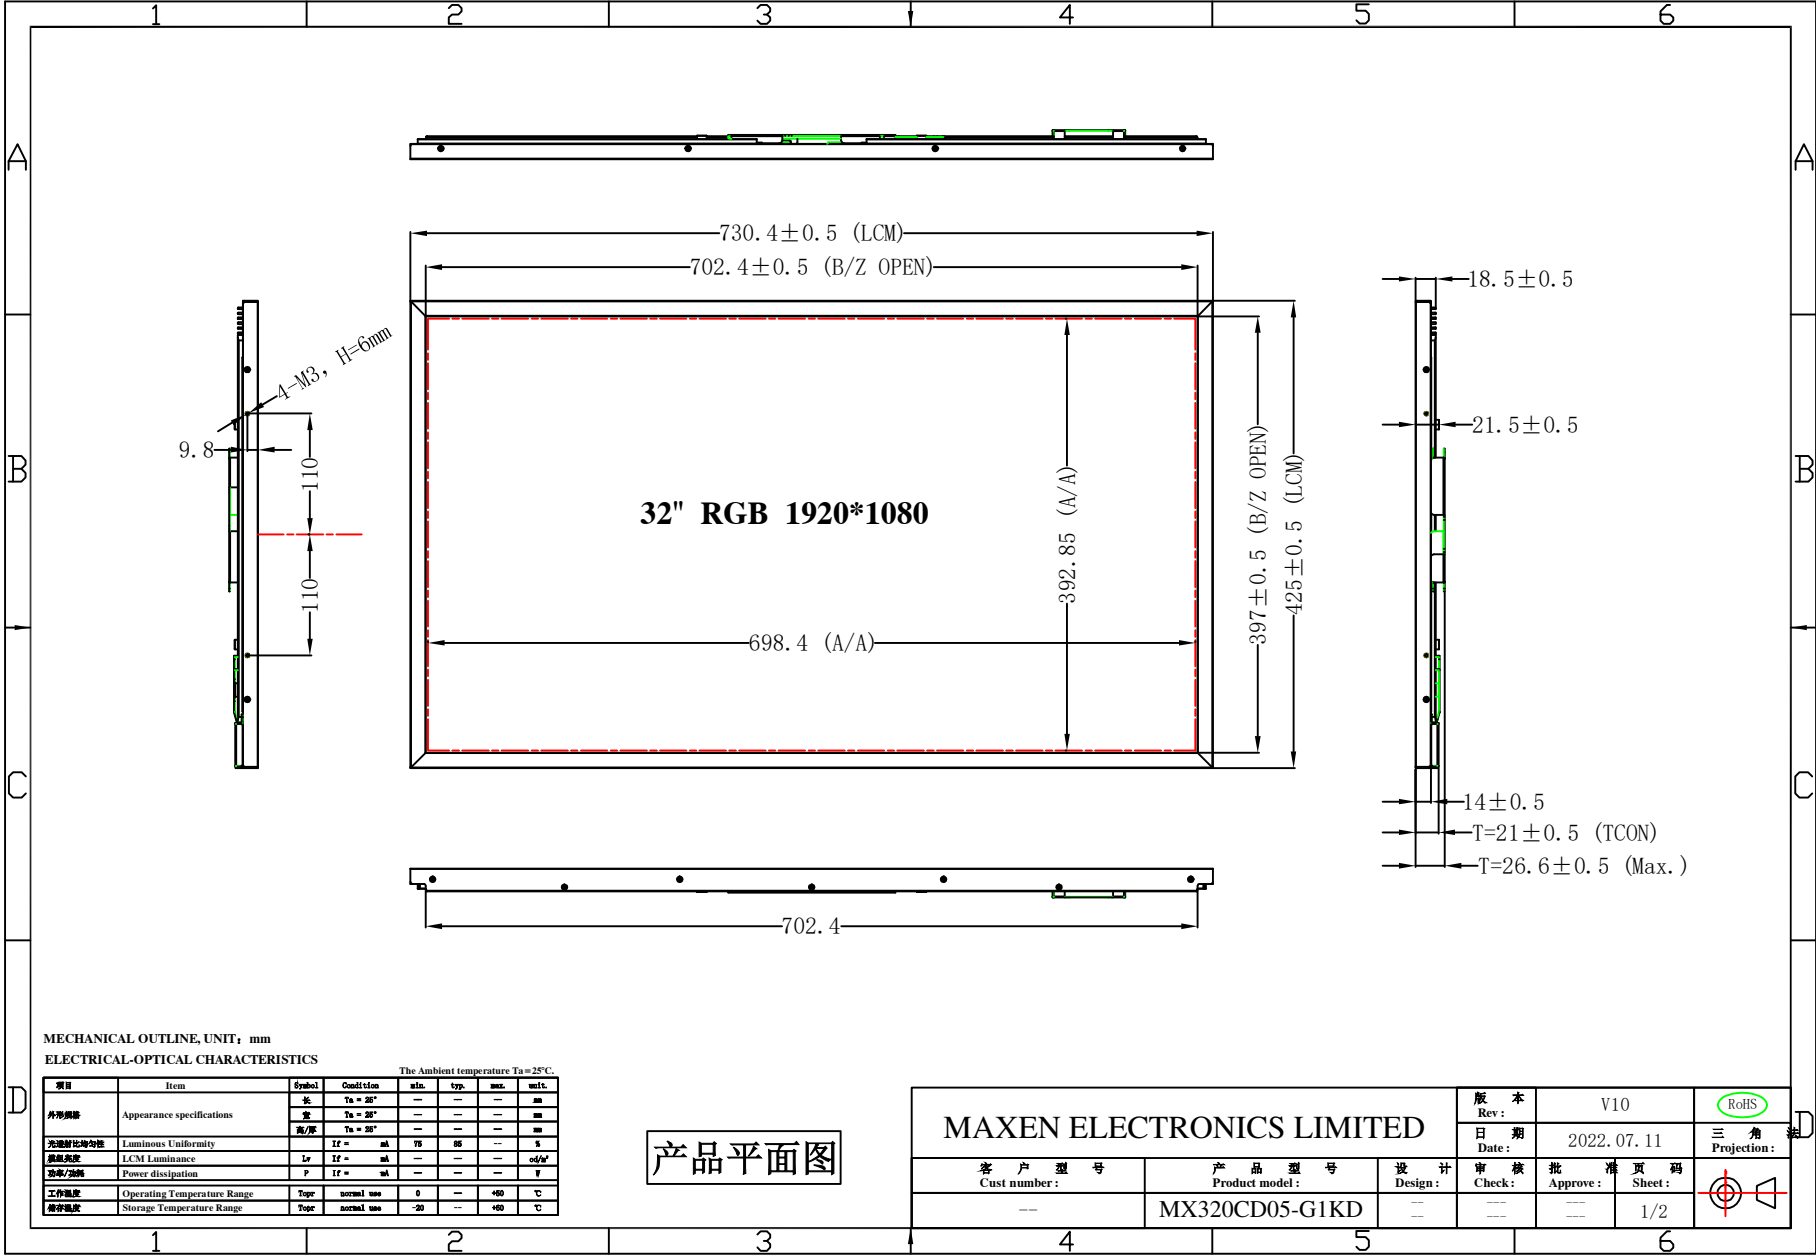

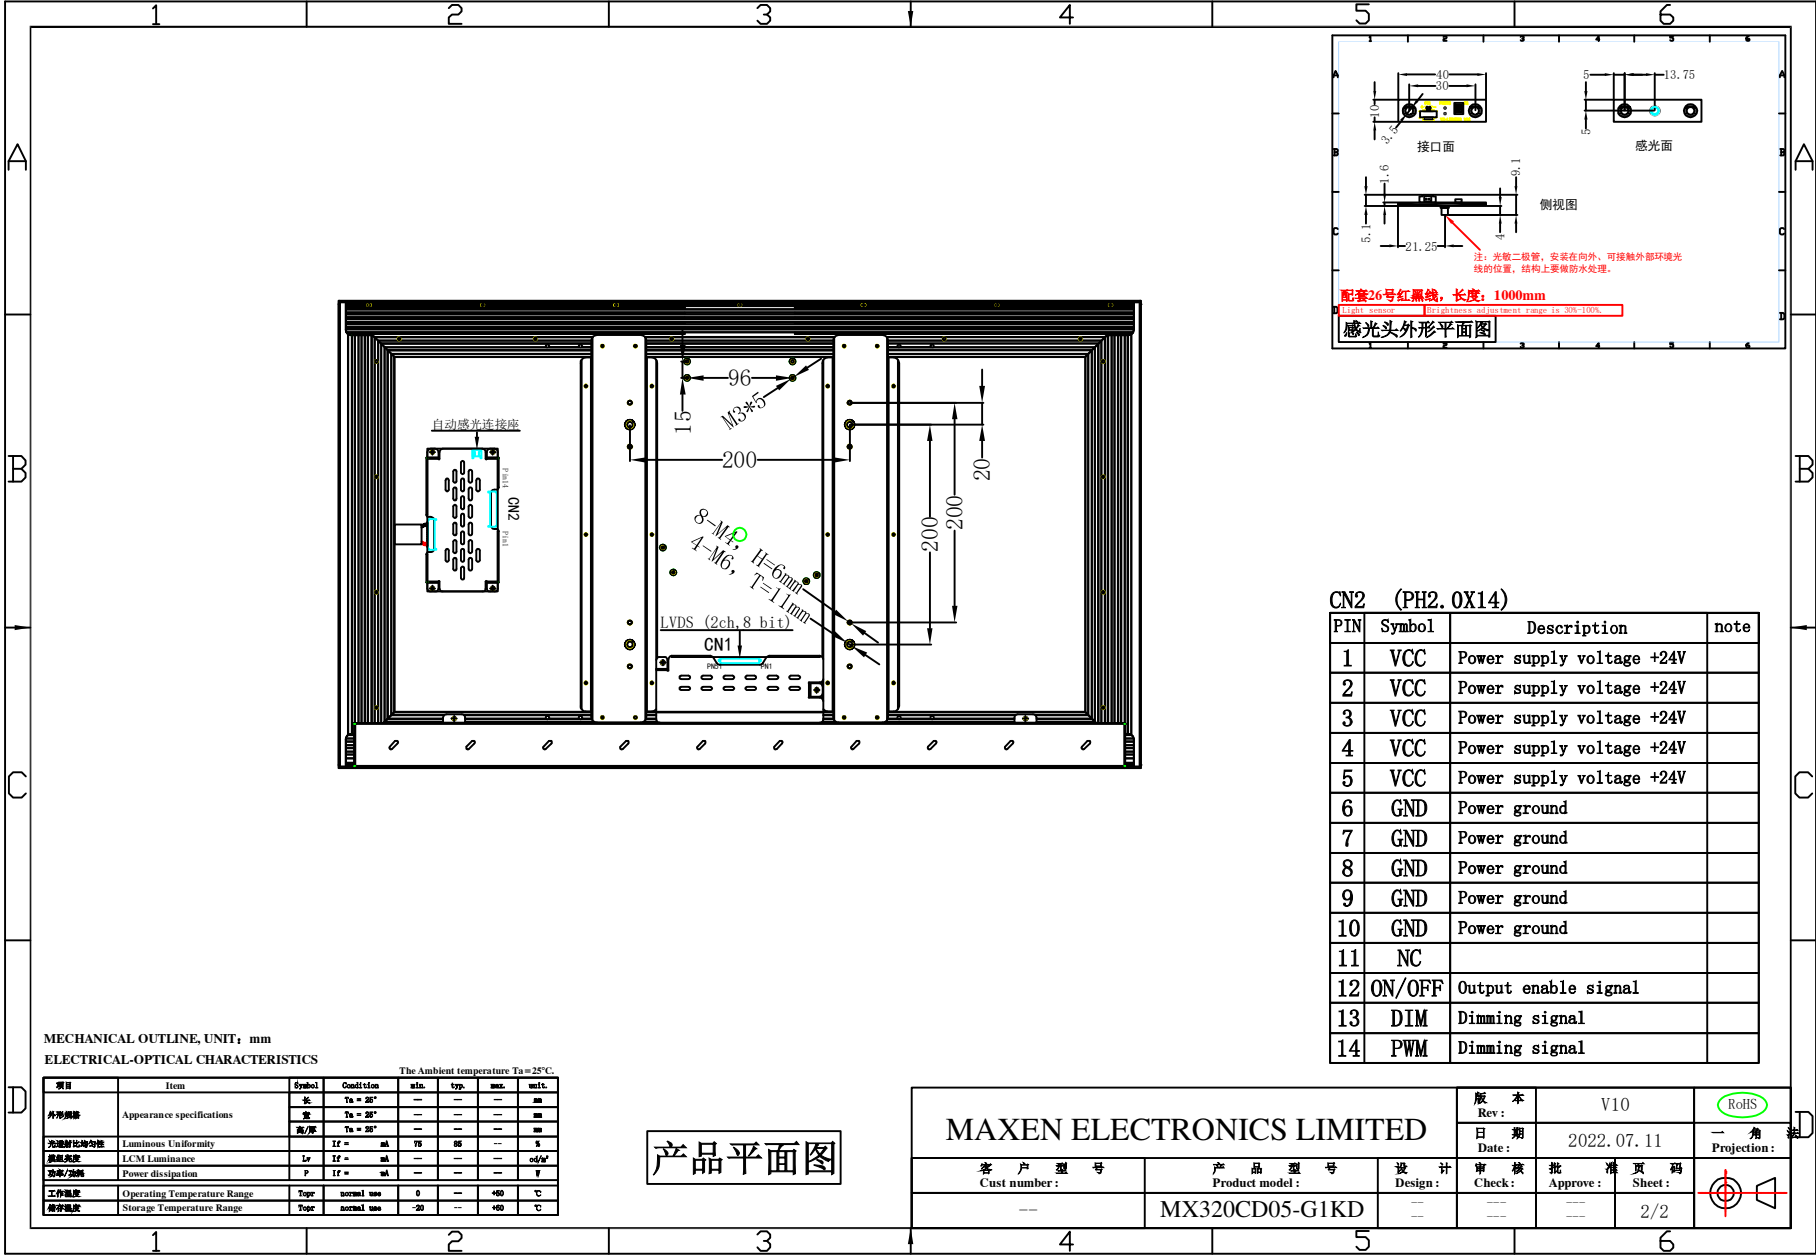


NO.	Rev.	Revision Record	Name	Date
	A0	首次发行	Y	2022-02-16
	A1	更正小板结构，增加标签	H	2022-08-17


正视图

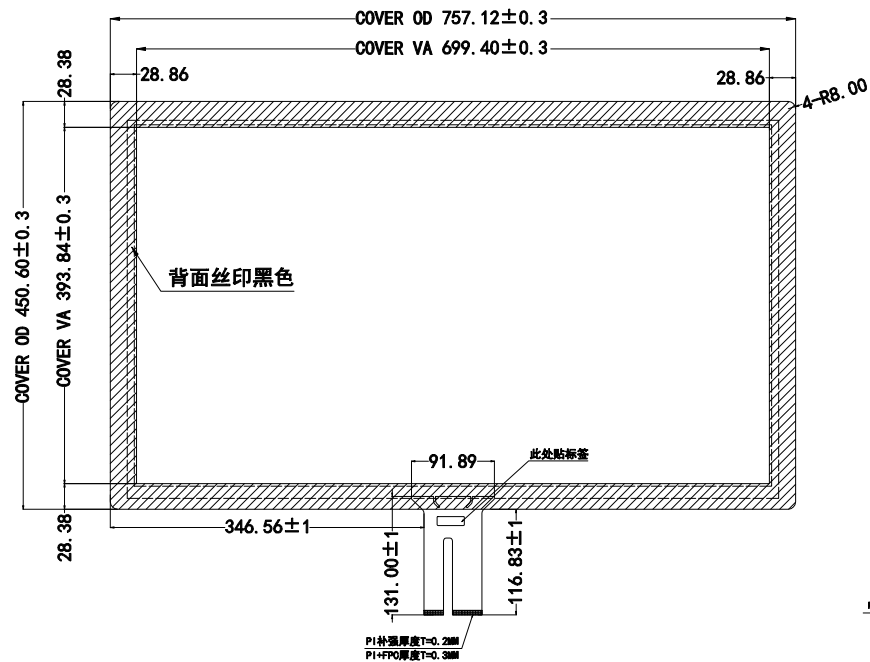

侧视图

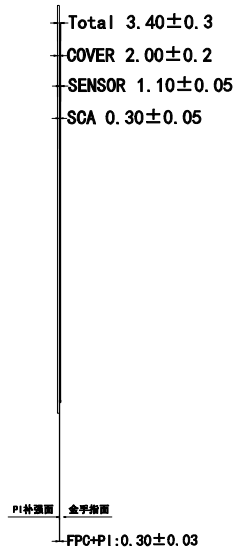


背视图

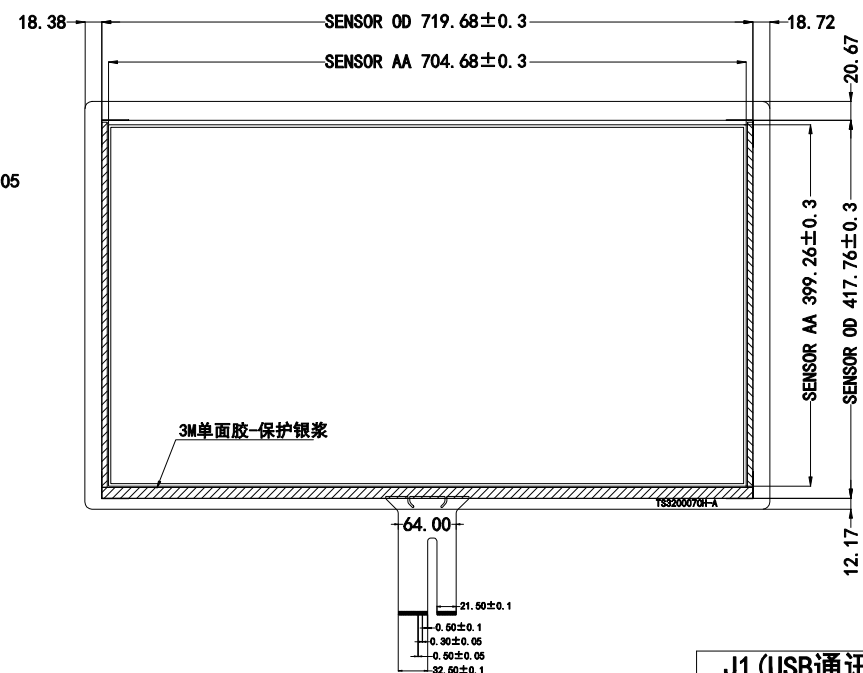

技术参数:

1. TP结构: G+G;
2. LENS 为强化玻璃;
3. TP类型: COB+PCB; 工作电压: 5V, 10点触摸;
IC选用: WD8752 (WD8752_6442_V1);
4. 表面硬度 $\geq 6H$;
5. 透光率 $\geq 85\%$;
6. 未注明公差为 $\pm 0.3mm$;
7. 产品符合RoHS标准.
8. 工作环境: $-20^{\circ}C \sim +70^{\circ}C$, $\leq 85\%RH$;
储存环境: $-20^{\circ}C \sim +70^{\circ}C$, $\leq 85\%RH$

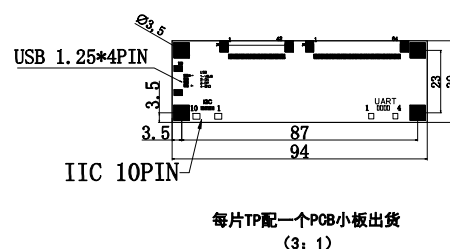

T=5.25±0.5
PCB T=1.6±0.1
TP 连接器 T=1.8±0.1
焊接 T=0.15±0.1
USB T=3.5±0.1
IIC T=1

J1 (USB通讯)	
PIN	定义
1	VDD/5V
2	D-
3	D+
4	GND

MAXEN ELECTRONICS LIMITED

TITLE: 产品编号	HCT32000QH-3A		结构图		
Designed By: 设计	H	Customerid: 客户编号	View: 投影方式		
Checked By: 审核		Unit: 单位			
Approved By:		Date: 日期	2022-08-17	Scale: 比例	1:1