

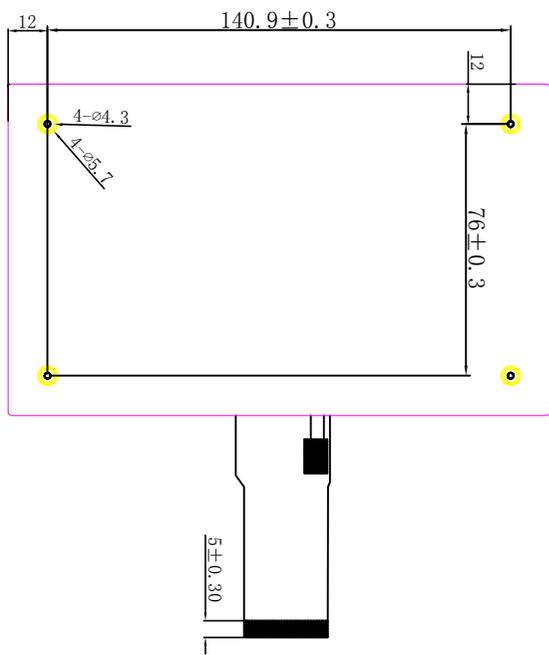
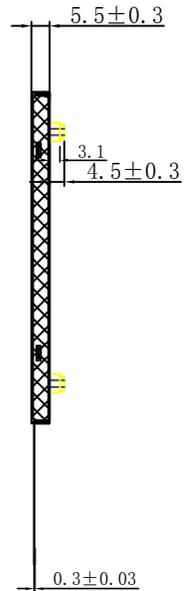


REV	DESCRIPTION	DATE
A	初版	2019.08.23

10	MMH
1	L2DA
2	L2DA
3	L2BK
4	L2BK
5	QD
6	YDMM
7	YDMM
8	YDMM
9	DE
10	YDMM
11	YDMM
12	BT
13	BT
14	BT
15	BT
16	BT
17	BT
18	BT
19	BT
20	BT
21	BT
22	BT
23	BT
24	BT
25	BT
26	BT
27	BT
28	BT
29	BT
30	BT
31	BT
32	BT
33	BT
34	BT
35	BT
36	BT
37	BT
38	BT
39	BT
40	BT
41	BT
42	BT
43	BT
44	BT
45	BT
46	BT
47	BT
48	BT
49	BT
50	BT

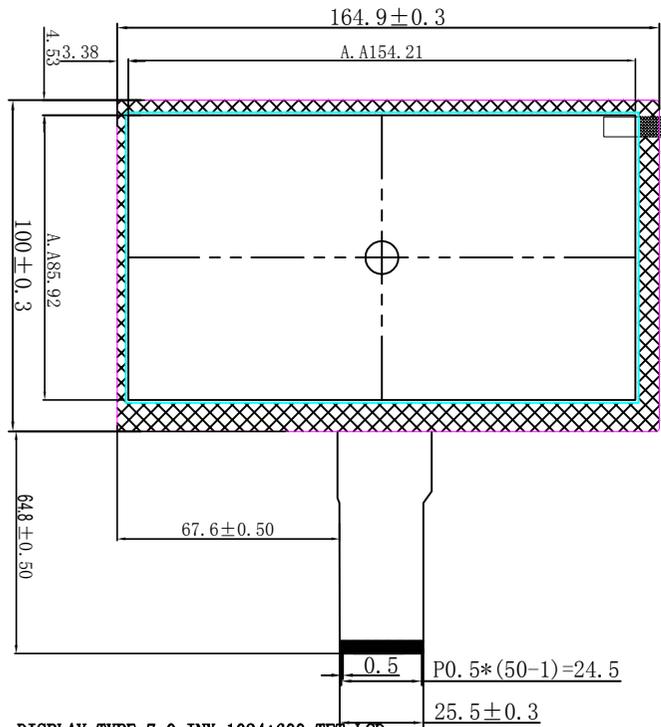

1. DISPLAY TYPE:7.0 INX.1024*600 TFT LCD
2. DISPLAY MODE:transmissive Normally Black
3. VIEWING DIRECTION: ALL 0° CLOCK
4. DRIVER IC:HX8282/HX8696
5. LCM(White 9 AVG 1/9)
Brightness:500cd/me
Uniformity:80% (MIN)
6. BACK LIGHT:33 chip white LEDs If=400mA, Vf=9V
7. OPERATING TEMP:-30° C TO 85° C, STORAGE TEMP:-35° C TO 85° C
8. *Critical Parameter, ()ref Parameter, []cpk Parameter
Unspecified Tolerances:±0.20mm
Modification mark:
9. SUGGESTION:TP window size unilateral increase 0, 3~0,5mm than LCM. A.A.
10. REQUIREMENTS ENVIRONMENTAL PROTECTION:RoHS

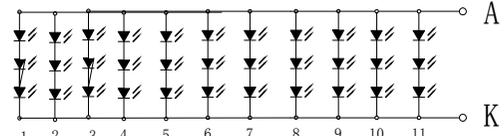

LED 电路图
Vf 9.0/TYP IF=400mA (定电流测试)

MAXEN ELECTRONICS LIMITED

TITLE:	ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE:±0.2	
MODULE NO.:	MX-070HR50AFH-N156	REV	A
DRAWN BY:		DATE:	
CHECKED BY:		DATE:	
APPROVED BY:		DATE:	
		PROJECTION:	
		SCALE:	N. T. S
		UNIT:	mm
		SHEET:	1 OF 1