

8

7

6

5

4




3

2

1

REV	DESCRIPTION	DATE
A	初版	

PIN	ASSIGNMENT
1	VLED-K
2	VLED-A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR(OC)
38	YD(OC)
39	XL(OC)
40	YU(OC)

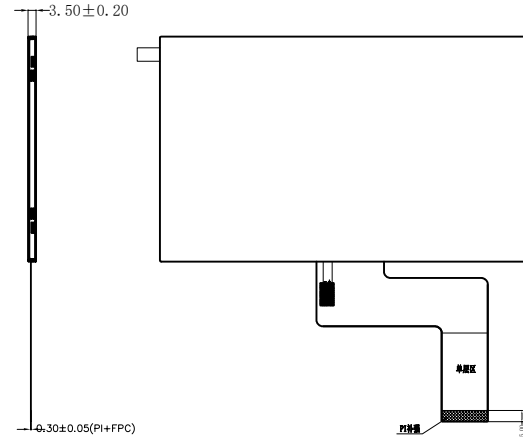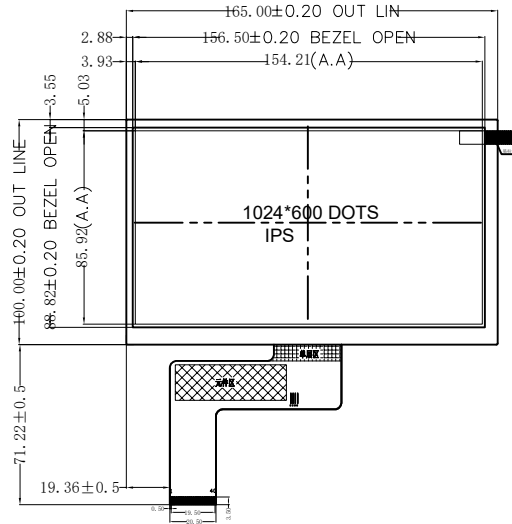

LED 电路图
 Vf 21.0/TYP
 IF=20*3=60mA(定电流驱动)

Specification:

- 1). Display mode: 16.7M, TFT/Transmissive
- 2). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 3). Backlight: 21 chip White LED
- 4). Dimensions with mark "*" are important, with mark "()" are referenced

MAXEN ELECTRONICS LIMITED

TITLE:	ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE: ±0.2	
MODULE NO.:	MX-B70HR40-IS38	REV	A
DRAWN BY:		DATE:	
CHECKED BY:		DATE:	
APPROVED BY:		DATE:	
PROJECTION:			
SCALE:N. T. S		UNIT: mm	
SHEET: 1 OF 1			

8

7

6

5

4

3

2

1