
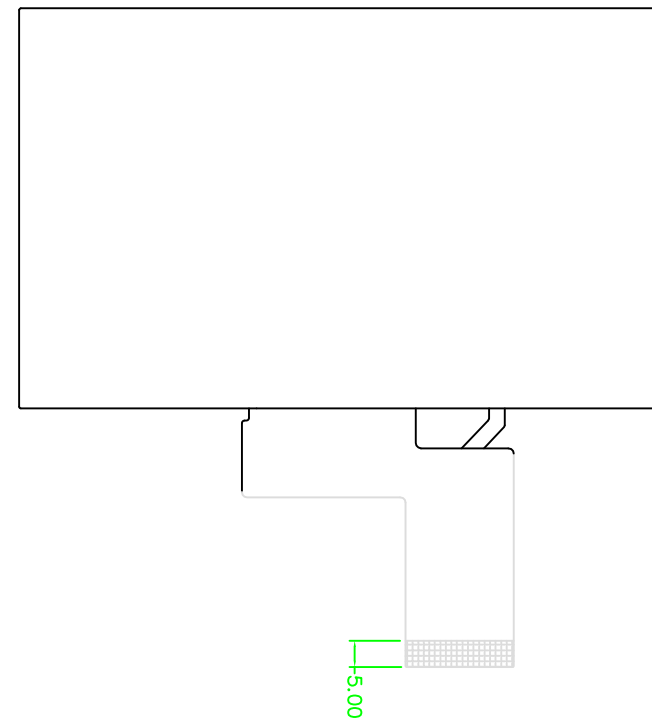
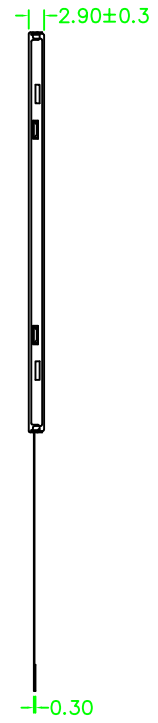



REV	DESCRIPTION	DATE
A	初版	

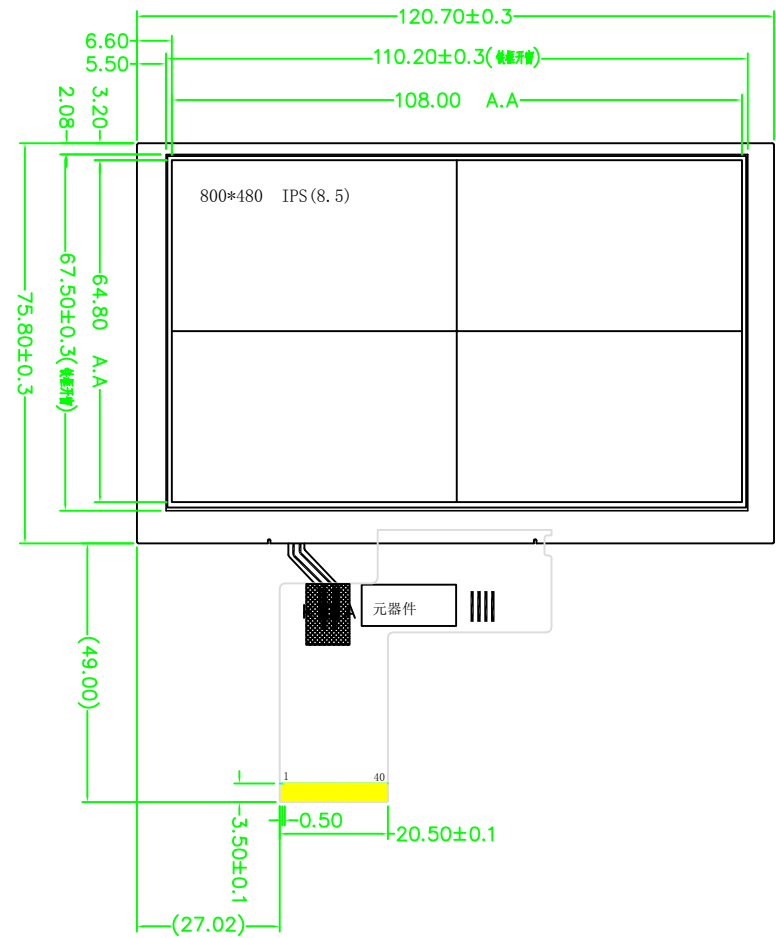

NO	PIN
1	LEDK
2	LEDA
3	GND
4	DVDD
5	RO
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

元器件

LED 电路图
 V_f 18.0/TYP
 $I_f=20*4=80mA$ (定电流测试)



Specification:
 1). Display mode: 16.7M, TFT/Transmissive
 2). Operating temp.: $-20^{\circ}C \sim +70^{\circ}C$
 Storage temp.: $-3^{\circ}C \sim +60^{\circ}C$
 3). Backlight: 24 hip White LED
 4). Dimensions with mark "*" are important, with mark "()" are referenced

MAXEN ELECTRONICS LIMITED

TITLE:	ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE: ± 0.2	
MODULE NO.:	MX-050WR40BFH-N61	REV	A
DRAWN BY:		DATE:	
CHECKED BY:		DATE:	
APPROVED BY:		DATE:	
PROJECTION:			
SCALE: N. T. S		UNIT: mm	
SHEET: 1 OF 1			