



Rev.	Revision Record	制作	日期
A0	首次发行	Y	2019-08-01
A1	添加EXC80W46控制板	Y	2021-08-03


FRONT VIEW

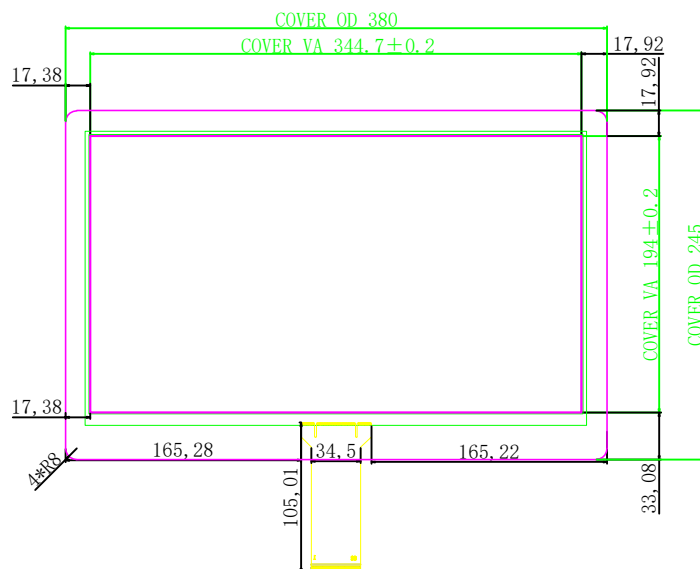

SIDE VIEW

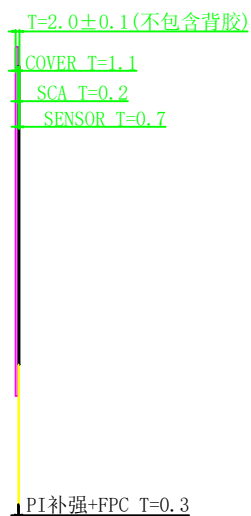


BACK VIEW

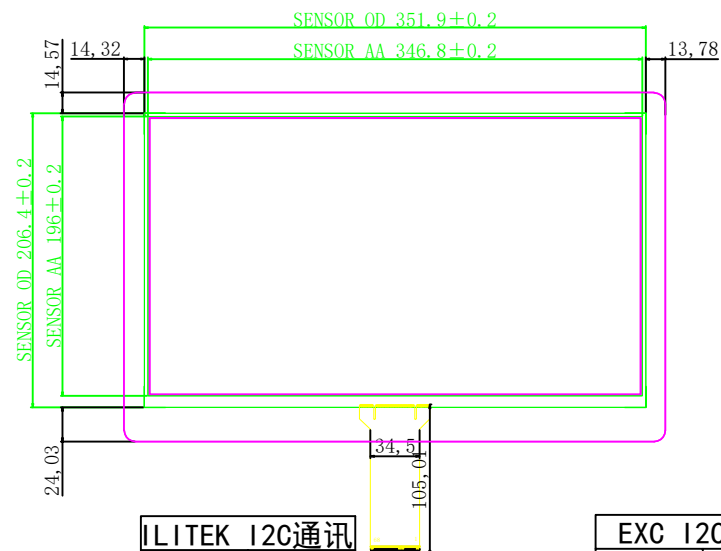

Parameters

- TP structure:G+G;
- TP Structure:COB;IC: EXC80W46
EXC80W462341STAG
Working volt:5V
- Transparence rate: $\geq$ 85%
- Surface hardness >6H
- Working temp.: -20 $^{\circ}$ C~+70 $^{\circ}$ C, $\leq$ 85%RH
- Storage temp.: -20 $^{\circ}$ C~+70 $^{\circ}$ C, $\leq$ 85%RH
- unmarked tolerance $\pm$ 0.3mm
- ROHS compliance

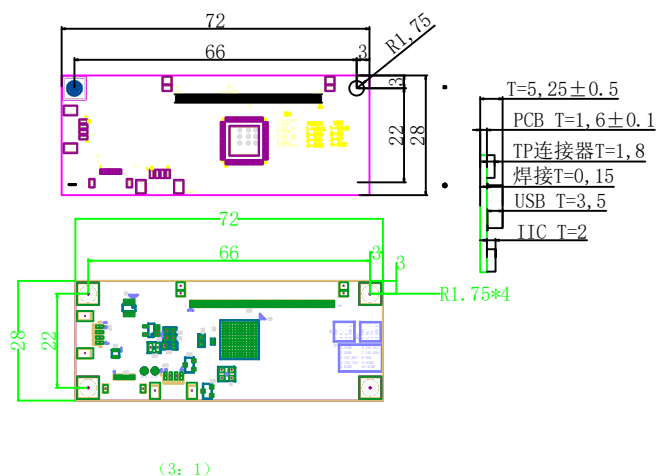

ILITEK I2C通讯	
PIN	定义
1	GND
2	GND
3	VDD3.3
4	SDA
5	SCL
6	GND
7	INT
8	RST
9	GND
10	GND

J1 (USB通讯)	
PIN	定义
1	VDD/5V
2	D-
3	D+
4	GND

EXC I2C通讯	
PIN	定义
1	GND
2	GND
3	RST
4	INT
5	GND
6	SCL
7	SDA
8	VDD3.3
9	GND
10	GND

MAXEN ELECTRONICS LIMITED

TITLE: 产品编号	HCT156001H-BBB				
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式	
Checked By: 审核		Unit: 单位	mm		
Approved By:		Date: 日期	2019.08.01	Scale: 比例	1:1