



NO.	Pin name	NO.	Pin name
1	NC	33	NC
2	VCI 3.3V	34	NC
3	IOVCC 1.8V	35	NC
4	GND	36	NC
5	RESET	37	NC
6	NC	38	NC
7	GND	39	VLED+
8	MIPI_D0N	40	VLED+
9	MIPI_D0P		
10	GND		
11	MIPI_D1N		
12	MIPI_D1P		
13	GND		
14	MIPI_CLKN		
15	MIPI_CLKP		
16	GND		
17	MIPI_D2N		
18	MIPI_D2P		
19	GND		
20	MIPI_D3N		
21	MIPI_D3P		
22	GND		
23	NC		
24	NC		
25	GND		
26	NC		
27	NC		
28	NC		
29	NC		
30	GND		
31	VLED-		
32	VLED-		

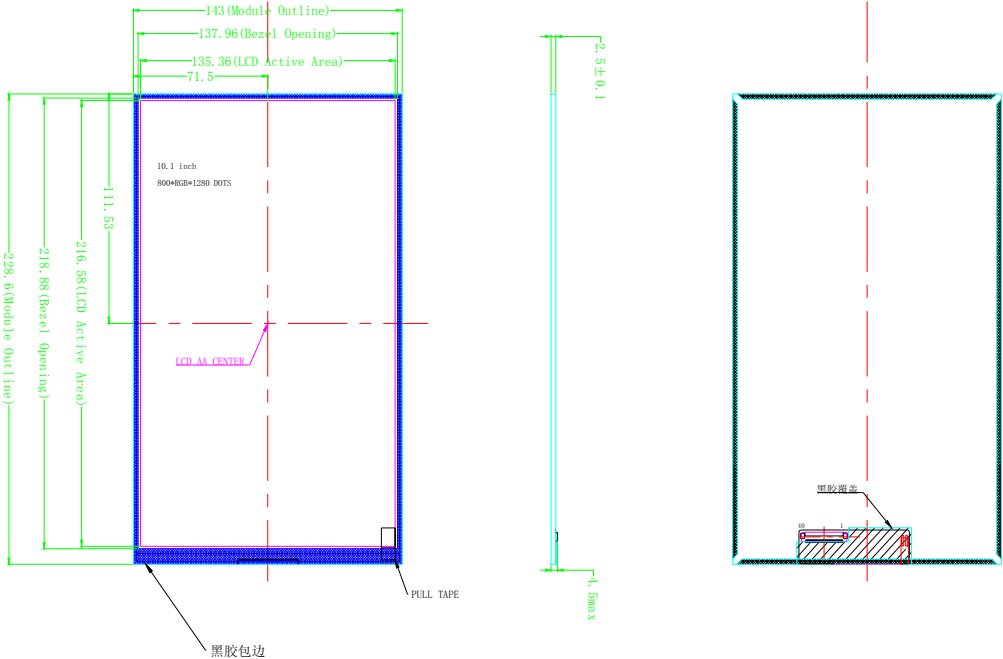

Back light circuit diagram:





* Unspecified Tolerances is:±0.2

Note:	
LCD TYPE	10.1 inch TFT IPS
DISPLAY MODE	Normally BLACK
VIEW DIRECTION	ALL
OPERATING TEMP.	-10° C ~ 50° C
STORAGE TEMP.	-20° C ~ 60° C
BACK LIGHT	27 White leds
BL voltage/current	9.6V / 180mA
ALL MATERIALS MUST BE ROHS COMPLIANT	

日期:

Back View

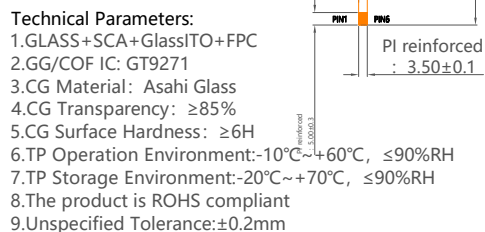

No.	Symbol
1	INT
2	SDA
3	SCK
4	RST
5	VCC
6	GND

Sensor ID	
OTP1	NC
OTP2	GND

物料	NO.	更改内容	日期	工程确认图			MAXEN ELECTRONICS LIMITED			
	①						方向		公司编号	HCT1567GG101A1-V0
	②			绘图	审核	日期			客户编号	
	③					20210906	版本号		比例	1 : 1
	④									
	⑤									
	⑥									
	⑦									

MAXEN ELECTRONICS LIMITED

公司编号	HCT1567GG101A1-V0	未注公差	± 0.20
------	-------------------	------	------------

客户编号		单位	mm
------	--	----	----

版本号		比例	1 : 1
-----	--	----	-------