

MAXEN ELECTRONICS LIMITED

Customer Code.:

SPECIFICATION OF BACKLIGHT

CUSTOMER'S P/N:


EDITION:

01

Date: 2022-7-14

Page: 1/1

THE THIRD ANGLE



FX'S P/N(exclude wrapper):

MX-B133FE30-IS03KB


FX'S P/N:
(include wrapper)

Approval (核准)

Check (检查)


Design (设计)

ZY

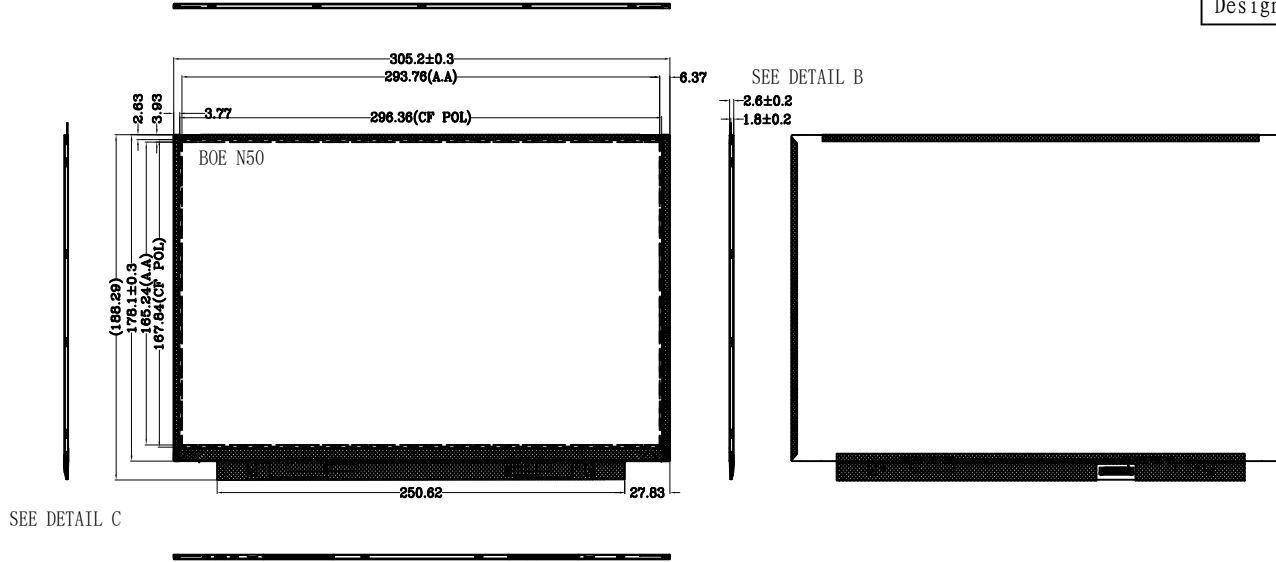

Notes:

1. Unit: mm.
2. Do not scale drawing.
3. All radii without dimension R0.2.
4. Modification Mark.
5. draft angle: 1°
6. Backlight luminance : 模组 350cd/m² (Typ)
7. Luminance uniformity: 75% (min) (min/max*100%)
8. UnSpecified Tolerance is ±0.5
9. Operation conditions : If= 80mA, Vf=26-30. 6V (MAX)
Color coordinate: X=0.27-0.35, Y=0.27-0.35
10. All materials comply with RoHS
11. The measured value of luminance and color coordinate bases FX's BM-7
12. Check item: 1-9



12	Front iron frame (上铁框)	0
11	FPC (软制电路板)	1
10	Double-sided stick (双面胶)	2
9	HOUSING (塑胶框)	1
8	PCB(印制电路板)	0
7	Wire (导线)	0
6	LED (发光二极管)	40
5	BEF(增光片)	2
4	Diffuser film (扩散片)	1
3	Light guide plate (导光板)	1
2	Reflector film (反射膜)	1
1	Rear iron frame (下铁框)	1
NO.	TITLE	Quantity

Customer: 客户	Approval Date: 确认日期	Approval Date: 22.07.05	DESCRIPTION (修改内容)	REVISER	Approve by: 确认
-----------------	------------------------	----------------------------	-----------------------	---------	-------------------

1

2

3

4

5

6

7

8