


MX-A80NR501K-TWY11

Customer Name: 客户名称:	Customer's Code: 客户料号:	第三视角	
Approved by: 承认:	Hadbest NO.: MIND 料号:	模组成品图	
Approval Date: 承认日期:	Edition: 版本号:	A0	

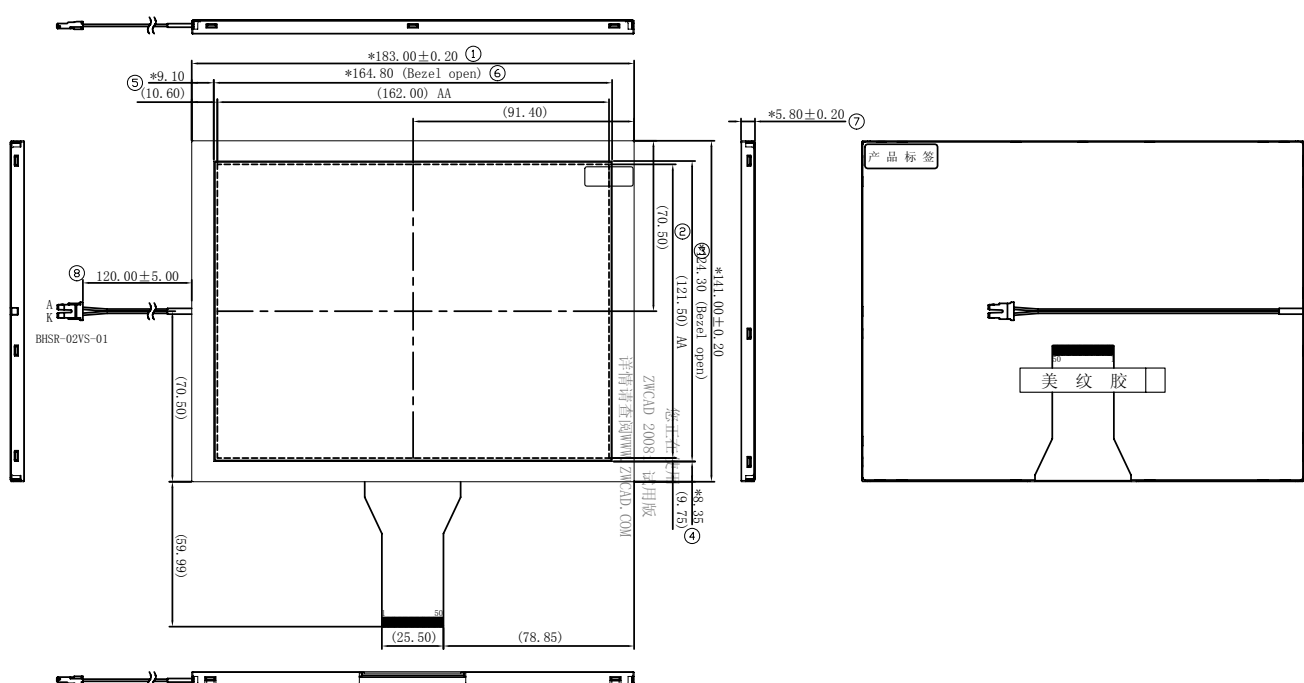


RoHS

- Notes:
- Unit:mm
 - Do not scale drawing
 - All radii without dimension R0.20mm
 - Luminous intensity(9 AVG):
Module:850cd/m² (Min), 1000cd/m² (Typ)
 - Uniformity:75% (Min)
VF:9.0V (Min):9.9V (Typ):10.5V (Max); IF:160mA (Fix)
 - The color coordinates:

	MIN	TYP	MAX
x	0.27	---	0.35
y	0.28	---	0.36

- △ Modification rev.number
- draft angle 1.0°
- General Tolerance:±0.20mm
- Mark mold cavity identification in recess approximately where indicated
- "*" For important dimension "(" for reference dimension
- RoHS must be complied. (Use Lead-free process)



12	产品标签	1
11	拉把贴布	1
10	美纹胶	1
9	上铁框	1
8	8DN 群创 玻璃	1
7	增光膜	2
6	扩散膜	1
5	反射膜	1
4	PCB+LED+端子线	1
3	下铁框	1
2	导光板	1
1	胶框	1

REV (修改)	DATE (日期)	DESCRIPTION (修改内容)	REVISER (修改者)	NO.	TITLE (项目)	QUANTITY (数量)			
Design by:	陈天亮	Check by:	彭国兴	Approval By:	曹俊威	Date: (日期)	13.05.24	Page: (页数)	1/1

MAXEN ELECTRONICS LIMITED
 Email: melody.xia@maxen-lcdsdisplay.com https://www.maxen-lcdsdisplay.com