



1		2		3		4		5		6		7		8	
MAXEN ELECTRONICS LIMITED								Customer Code. :				SPECIFICATION OF BACKLIGHT			
								CUSTOMER' S P/N:				EDITION:		02	
Date:		2024-10-21		Page:		1/1		THE THIRD ANGLE		P/N(exclude wrapper):		MX-101FL40BFH-N71		P/N: (include wrapper)	
												Approval (核准)			
												Check (检查)			
												Design (设计)		ZQT	

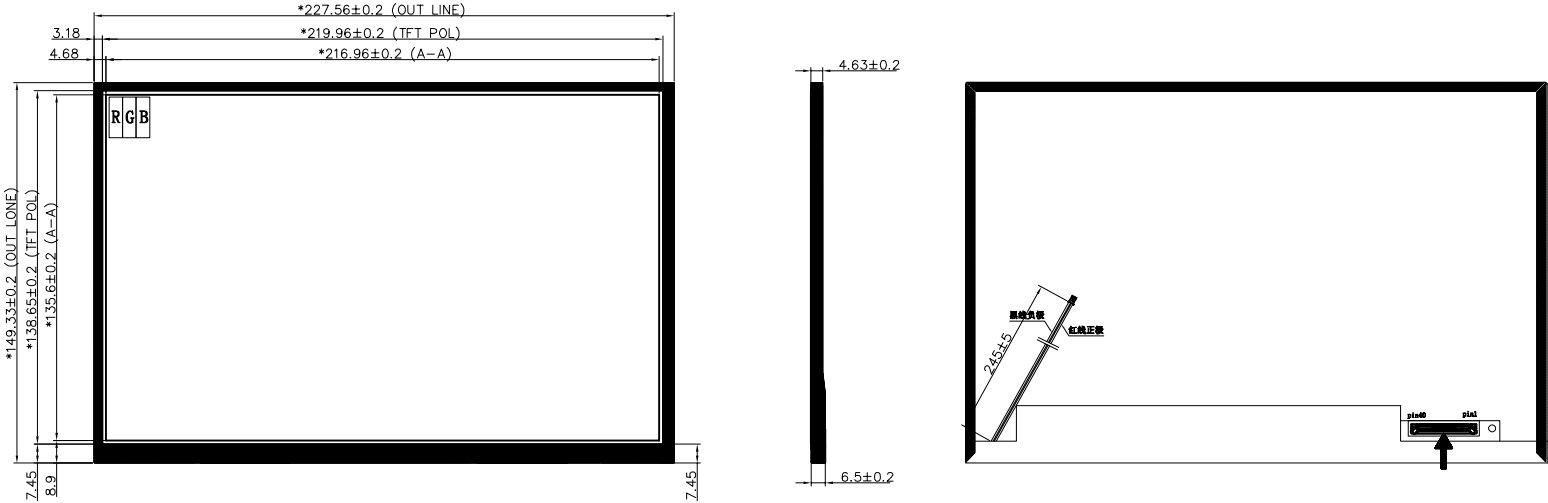

- Notes:
- Unit:mm.
 - Do not scale drawing.
 - All radii without dimension R0.2.
 - Modification Mark.
 - draft angle: 1°
 - Backlight luminance :1000cd/m²(Min)
 - Luminace uniformity: 75%(min) (min/max*100%)
 - UnSpecified Tolerance is ± 0.2
 - Operation conditions :If= 420mA, Vf=16.8-19.8V (MAX)
Color coordinate:X=0.27-0.35,Y=0.27-0.35
 - All materials comply with RoHS
 - The measured value of luminace and color coordinate bases BM-7
 - Check item:1~9



11	FPC (软性线路板)	1
10	Double sided stick (双面胶)	2
9	HOUSING (塑胶框)	1
8	PCB(印制电路板)	1
7	Wire (导线)	0
6	LED (发光二极管)	36
5	BEF(增光片)	3
4	Diffuser film (扩散片)	1
3	Light guide plate (导光板)	1
2	Reflector film (反射膜)	1
1	Rear iron frame (下铁框)	1
NO.	TITLE	Quantity

Customer:		Approval Date:		Approve by:			
客 户		确认日期		确 认			