


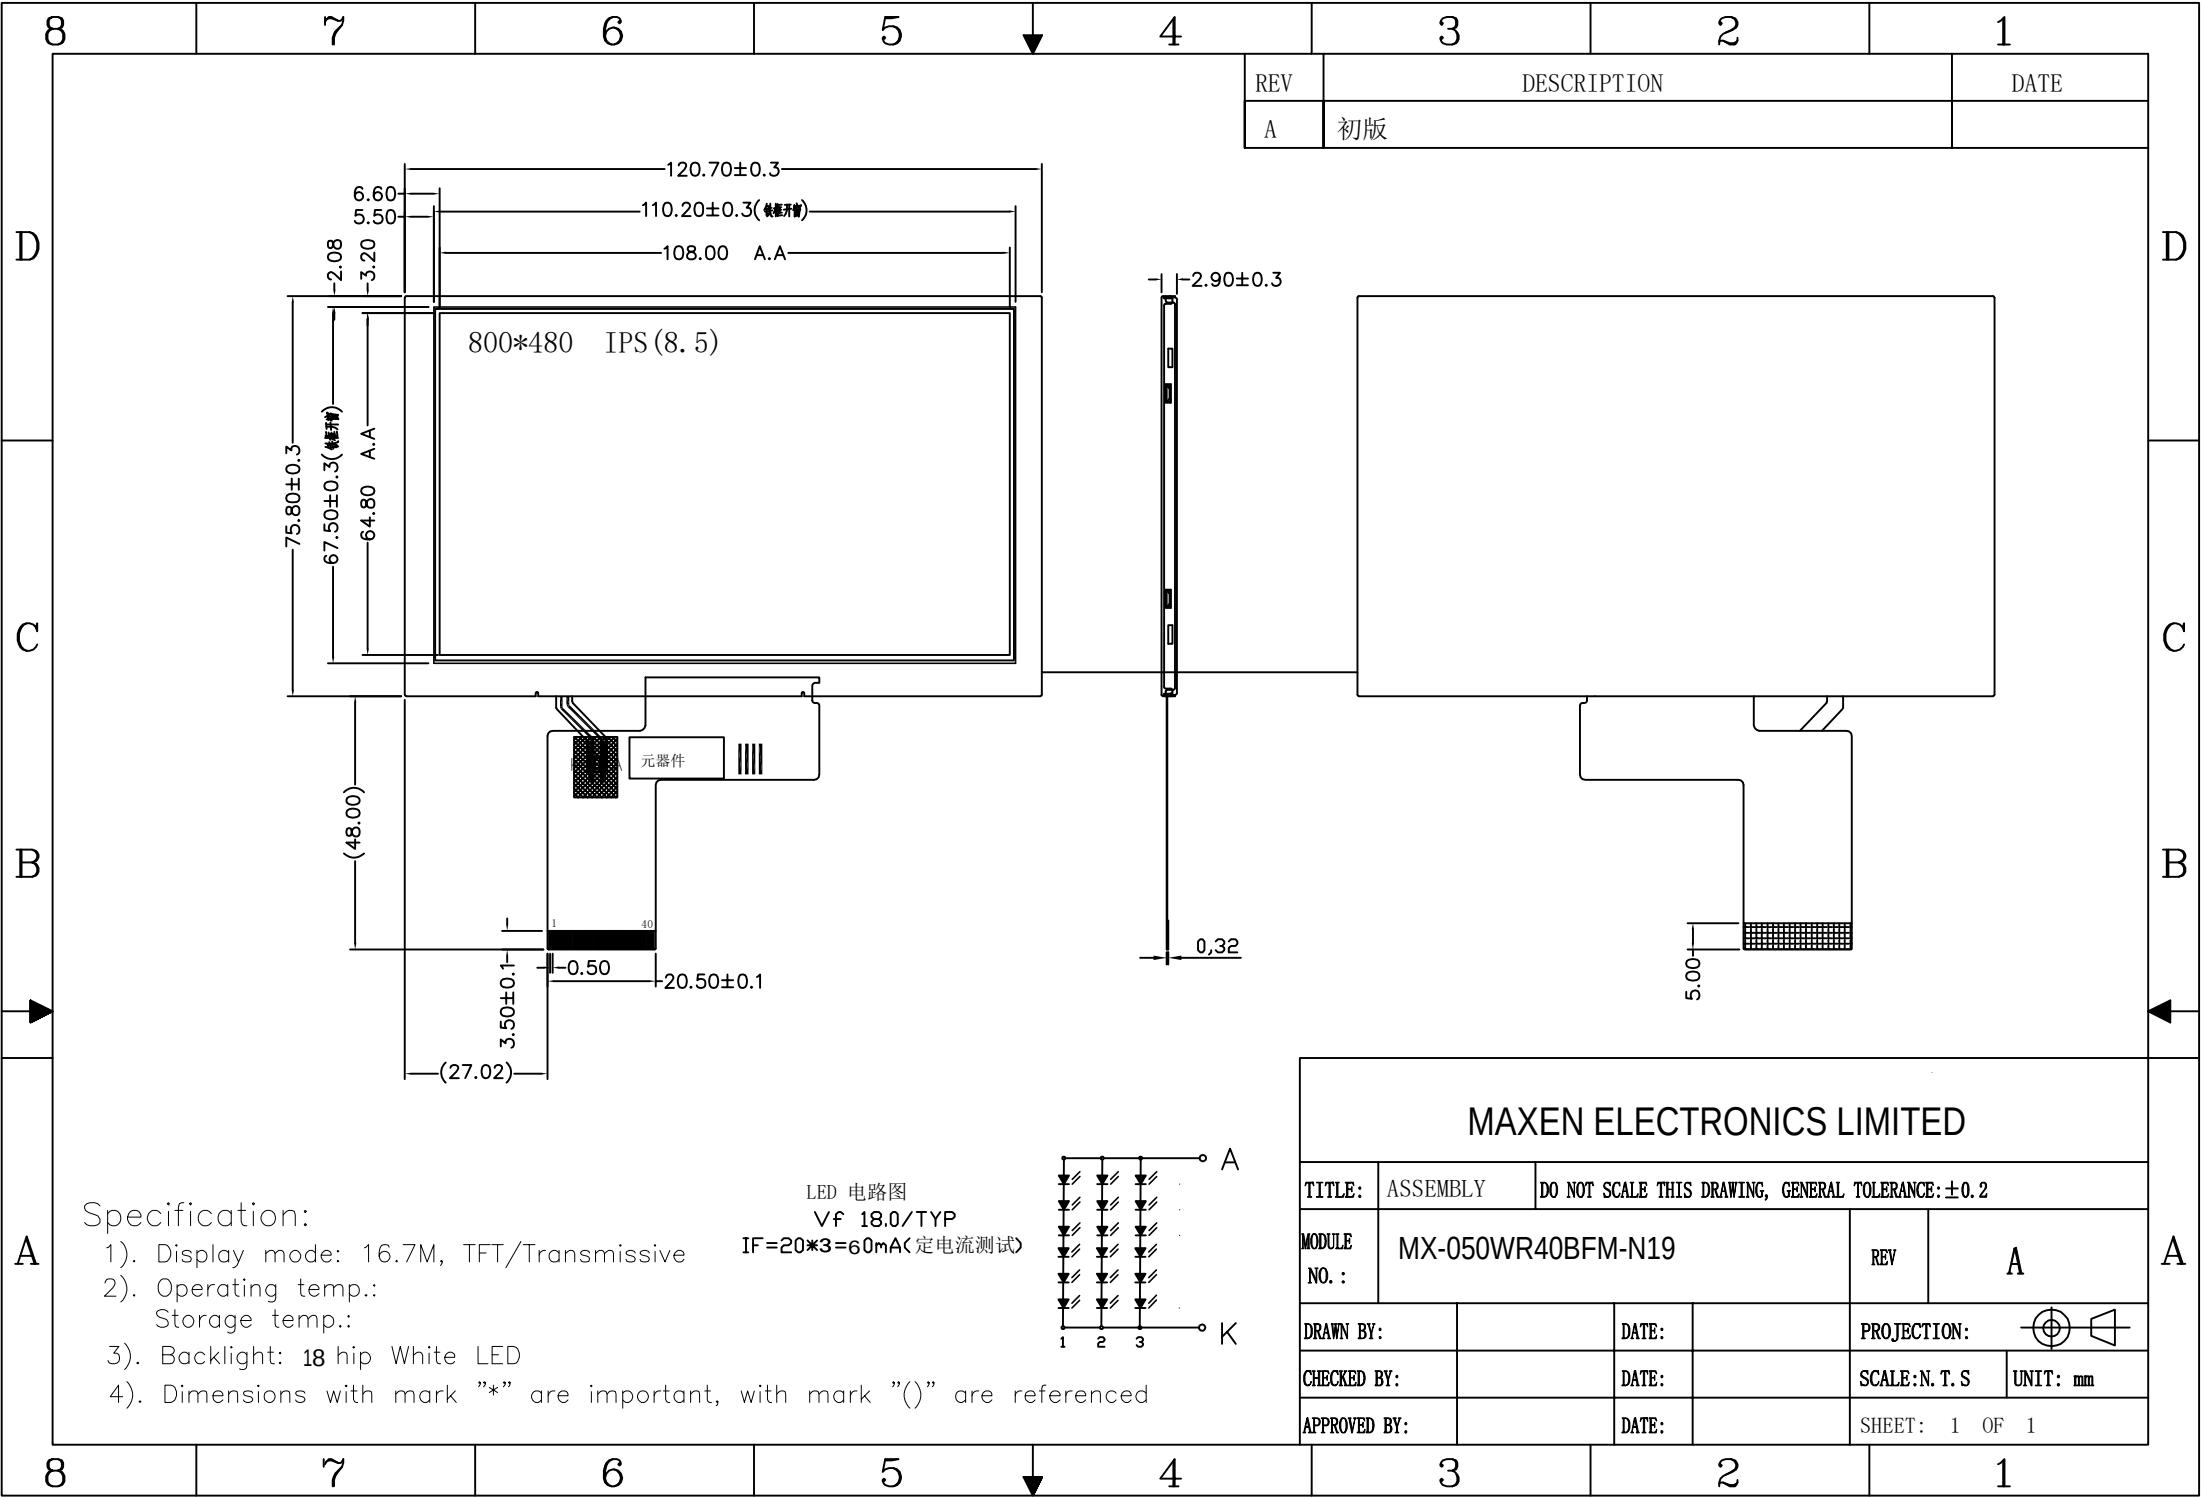


REV.	DESCRIPTION	DATE

正面图

侧面图


反面图

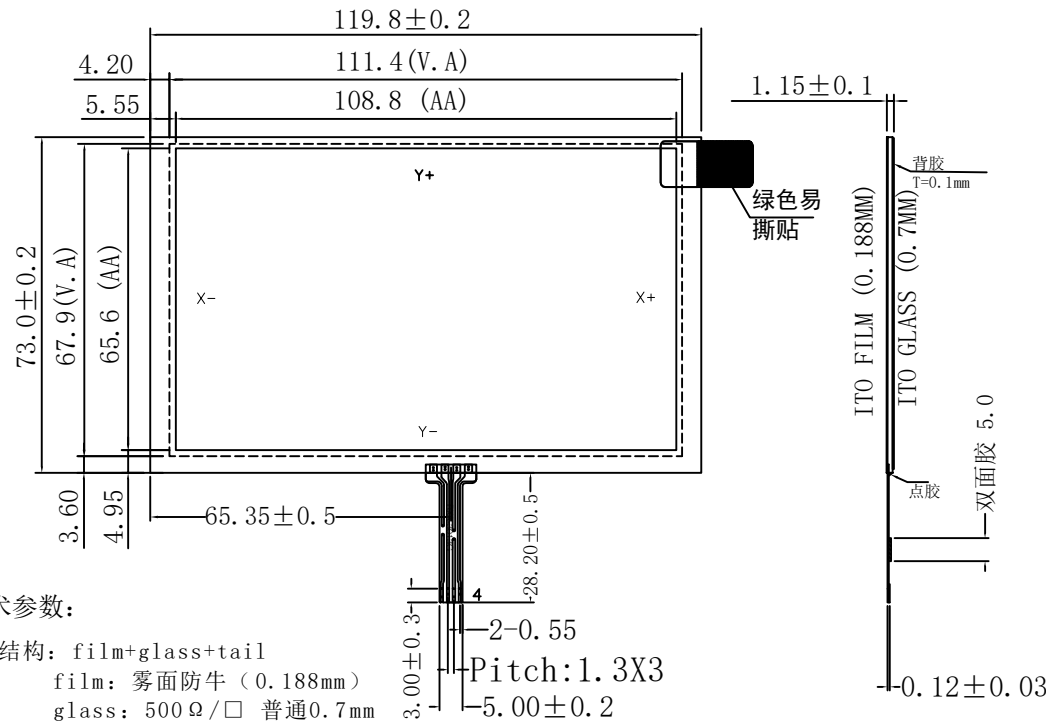

技术参数:

1. 结构: film+glass+tail
film: 雾面防牛 (0.188mm)
glass: 500 Ω / $\square$ 普通0.7mm
tail: FPC (pitch1.3)
产品总厚度: 触摸屏 1.15 ± 0.1 mm

2. 电路等级: DC5V
3. 绝缘阻抗: $\geq 20M \Omega$ (25V DC)
4. 线性: $\leq 1.5\%$
5. 透光率: $76\% \pm 3\%$
6. 操作压力: 50-120g
7. 使用寿命: $\geq 1,000,000$ 次
8. 笔划寿命: $\geq 100,000$ 次
9. 工作环境: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
10. 储存环境: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
11. X: $150-900 \Omega$ Y: $150-900 \Omega$
12. 未注尺寸公差按 ± 0.50



逻辑图


PIN	OUT
1	Y-
2	X-
3	Y+
4	X+

SCALE: 1 : 1	
NOT TO SCALE	
PAGE: 1 OF 2	
GENERAL TOL.	UNITS
0.50mm	MM
APPROVALS	DATE
APP Mychan	2023-08-30
CHK DSX	2023-08-30
DWN DSX	2023-08-30

MAXEN ELECTRONICS LIMITED

MODEL NUMBER :

RXA-05002



CUSTOMER P/N :

DATE:
2023-08-30